



## **DUST CONTROL AND LOADING SYSTEMS**



### **SERVICING THE WORLD'S BULK LOADING NEEDS**

**LOADING SPOUTS  
LOADING SPOUT POSITIONERS  
AERATION EQUIPMENT  
SHUT-OFF VALVES**

**DIVERTER VALVES  
DUST COLLECTION EQUIPMENT  
BAG AND DRUM FILLING  
PLANT AUTOMATION**

**DCL BULK TECHNOLOGIES PVT. LTD.**


(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

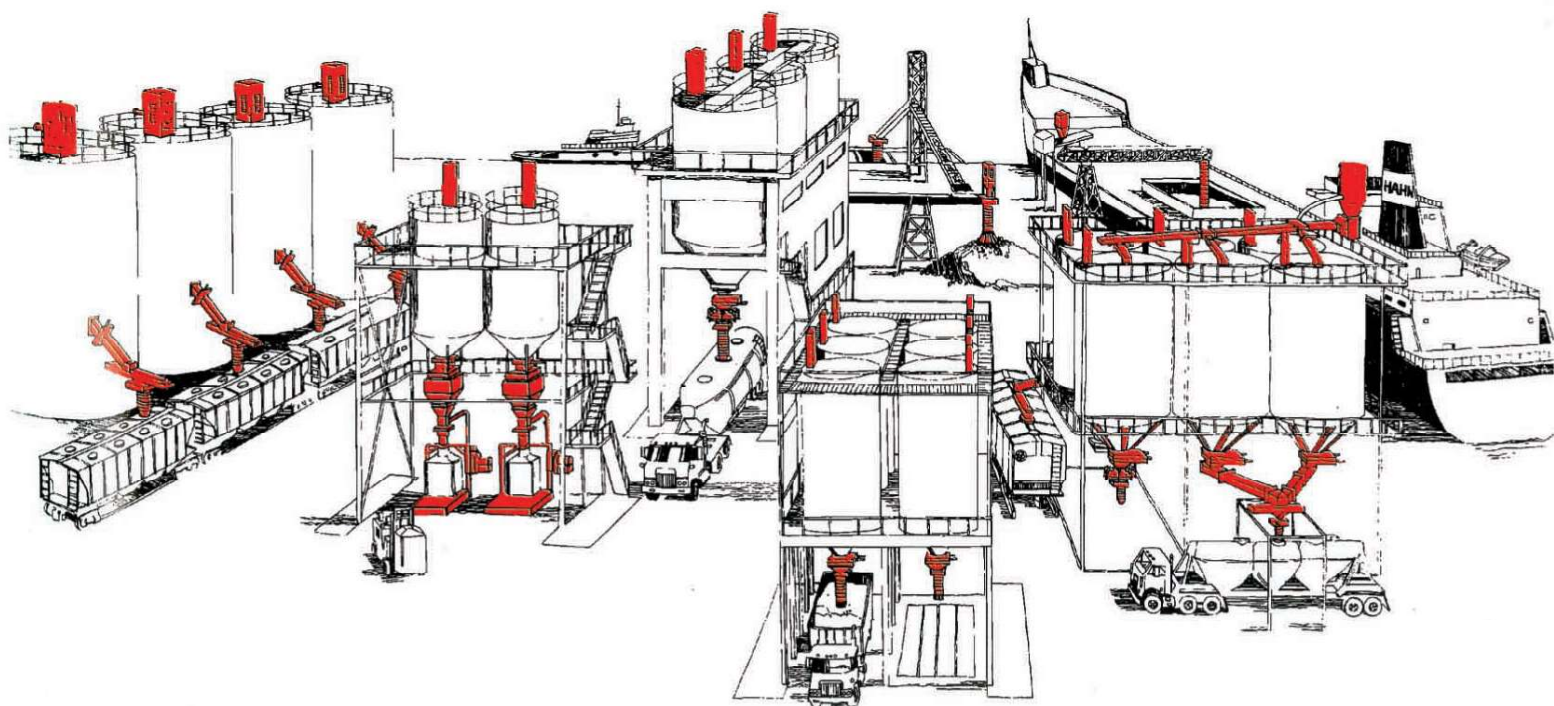



## Company Profile

A Privately held company located in Charlevoix, Michigan, U.S.A that was founded in 1981 with Reinhard Matye as President and Werner Egger as Vice President. DCL was developed to provide complete loading systems as well as partial components to the bulk material handling industry. Seasoned veterans in Technical Sales, Engineering and Manufacturing give DCL the capabilities of designing equipment to meet and understand all field applications.

**DCL Bulk Technologies Pvt. Ltd., is now a 100% U.S.A. owned subsidiary with its manufacturing facility at Hyderabad, India. DCL India commits itself the quality of product, efficient after sales service that have been the policy of the parent company.**

Seasoned veterans in Engineering and Manufacturing give the capabilities of designing custom systems or equipment to help meet customer's particular needs. Involvement with companies, who deal in dry bulk materials from abrasive glass to toxic powder, chances are good that DCL is familiar with your needs. Proven teams of Electrical Design Specialist are utilized in combining the right electrical functions for any industrial application. The use of PLC or computerized controls help to complete any DCL state of the art system.

DCL, provides a full product line that includes: Dust free Loading Spouts, Spout Positioners, Horizontal and Vertical Slide gates, Diverters, Trimesters Flow Control Valves, Air Gravity Conveyors, Silo Aeration, Dust Collectors, Bag and Drum Filling equipment, and Control packages. Individually or in full systems these components are available for modification allowing for tailor made designs that can be created to fit with existing equipment for unique specifications. As specialist in load out systems DCL is prepared to offer full turnkey solutions for Ship, Barge, Truck or Railcar Loading.

DCL designs systems to meet the needs of any customer. Our Engineers consider every aspect of your loading operation, provide the best and most economical approach to your material handling needs.

DCL also manufactures and supplies system control panels, fans and motors, replacement spouts and sleeves for other manufacturers equipment, and a variety of other custom options.

## Contact Information

*Mailing Address :*

**Asian Operations :**

**DCL Bulk Technologies Pvt. Ltd.**

**(A 100%Indian Subsidiary of DCL Inc., U.S.A),**

**Plot No: 18A, Phase - 1, IDA, Jeedimetala,**

**Hyderabad - 500 055. Telangana State, India.**

Phone : +91-40-23093888(Board Line)

Email : [info@dclbulktech.com](mailto:info@dclbulktech.com)

[marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

Website : [www.dclbulktech.com](http://www.dclbulktech.com)

*Corporate Office Address* DCL Inc.  
P.O. BOX. 125  
CHARLEVOIX,  
MICHIGAN 49720  
U.S.A.

*Phone :* 001-231547-5600  
001-231-547-0563

*Fax :* 001-231-547-3343  
001-231-517-5832

*Website :* URL : [www.dclinc.com](http://www.dclinc.com)

*General Email :* [info@dclinc.com](mailto:info@dclinc.com)

**Loading Spouts** ▶

**Loading Spout Positioners** ▶

**Aeration Equipment** ▶

**Shut-Off Valves** ▶

**Diverter Valves** ▶

**Dust Collection Equipment** ▶

**Bag Fill Station** ▶

**System Controls** ▶

**Smart Loader Vision System** ▶

**Accessories** ▶

**Case Histories** ▶



# Loading Spouts ▼

## ▶ STANDARD DUTY MODELS

EV20; OV20; EV24; OV24; EV32; OV32; UN800EV; UN800V

## ▶ HEAVY DUTY MODELS

EV38HD; OV38HD; OV44HD; OV58HD; OV66HD; OV88HD; TS18;  
TS24; TS30; TS36; TS44

## Loading Spout


### LOADING SPOUT

EV enclosed vehicle or OV open vehicle spouts provide excellent dust free loading performance for trucks and railcars. DCL has incorporated 20 years of experience in bulk loading of dry materials into this new service friendly retractable spout design. The low profile feature makes this spout the best choice when faced with limited space conditions.



EV LOADING SPOUT

- Easy access to drive components.
- Three cable hoist system proving maximum spout stability.
- Shipped completely assembled and tested.
- Slack cable and drive limits factory set.
- Internal stacking product flow control cones are constructed from urethane, AR steel or optional stainless steel.
- Wide selection of flexible outer spout sleeve materials for high and low temperature applications provided with heavy duty aluminum stacking type support rings.
- EV enclosed vehicle or OV open vehicle discharge configuration.
- Vertical travels up to 18 feet.
- Loading capacities of up to 450 cu ft/min of fine aerated materials.
- Collar style dust outlet for connection to a free standing dust collector or vent through frame configuration for connection to an inline filter module.

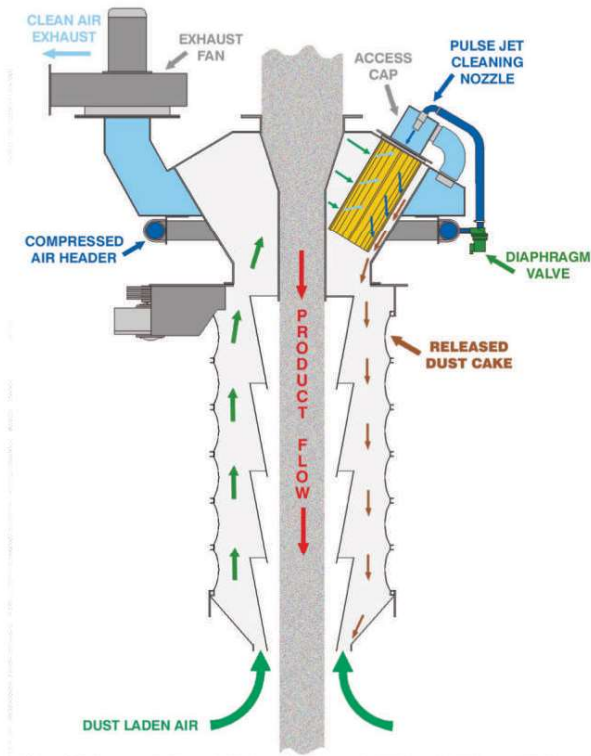

The CFM filter module adds 30" to the retracted spout height.

### SPOUT / CFM COMBINATION

DCL's new Compact Filter Module provides the industries lowest profile filter/loading spout combination. The CFM filter module is used inline with the UN800 Loading Spout for dust control during the loading of dry, dusty materials into open or enclosed vehicles. The dust collected is re-entrained with the material being loaded which makes the CFM Filter Module an ideal and cost effective package. When comparing the new design of the CFM filter module to free standing units, the savings in space and money become apparent with the elimination of expensive duct work, discharge air locks and hopper discharge systems. For detailed CFM specifications see flier PUBc-0499-DCFM.

#### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India


Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

## Heavy Duty Loading Spouts

**BARGE LOADING • SHIP LOADING  
STOCKPILING • HIGH CAPACITY OPEN LOADING**

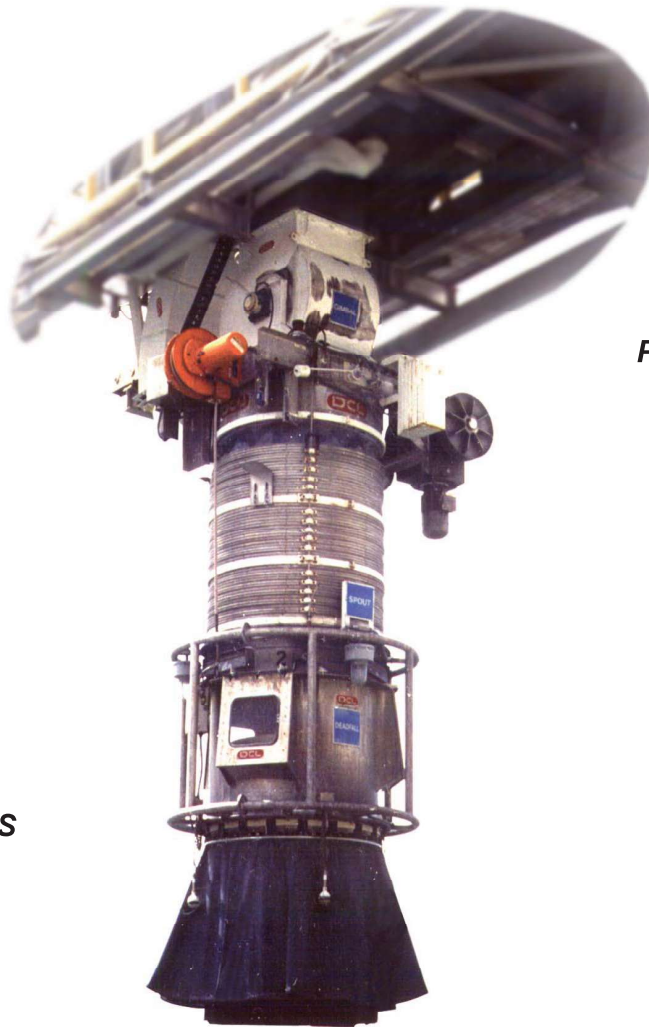

**ALUMINA  
BENTONITE CLAY  
CALCINED COKE  
CLINKER  
COAL  
CORN PRODUCTS  
FERROUS OXIDE  
FERTILIZER PRODUCTS  
GRAIN PRODUCTS  
GYPSUM  
KAOLIN CLAY  
LIGNITE**

**LIMESTONE  
MAGNESIUM OXIDE  
PHOSPHATE PRODUCTS  
PENCIL PITCH  
PORTLAND CEMENT  
POTASH  
SALT  
SLAG  
SODA ASH  
SODIUM SULFATE  
UREA  
WOOD CHIPS  
ZINC OXIDE**

<b>OV38HD</b>	•	<b>OV44HD</b>	•	<b>OV58HD</b>	•	<b>OV66HD</b>	•	<b>OV88HD</b>
<b>600CFM</b>		<b>760CFM</b>		<b>1300CFM</b>		<b>1800CFM</b>		<b>2700CFM</b>
<b>(1019 M<sup>3</sup>/HR)</b>		<b>(1291 M<sup>3</sup>/HR)</b>		<b>(2208 M<sup>3</sup>/HR)</b>		<b>(3058 M<sup>3</sup>/HR)</b>		<b>(4587 M<sup>3</sup>/HR)</b>

**DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)





Heavy duty flex style spouts use inner cones to contain product flow enclosed by an outer sleeve for dust withdrawal. Inner cones are available in durable, lightweight urethane, carbon steel in hardnesses to 700 BHN, or in stainless steel.



Model OV58 shown w/unique DCL dust collector integral w/ belt conveyor headchute.



Dust free coal stockpiling.



Pivoting gimbal allows different loading angles.



## HEAVY DUTY LOADING SPOUTS

DCL Heavy Duty Loading Spouts utilize the latest technological advancements in the industry, providing dust free loading of a wide range of dry dusty materials at loading rates up to 6,000 STPH.

Heavy duty flexible style loading spouts are used for loading; ships, barges, and stockpiling. All HD models include an outer flexible sleeve and rubber skirt that contains the dust emissions produced during loading. Also included is a rugged drive train and unique three cable lifting system for maximum stability. The inner cones contain the product flow are offered in a variety of materials to suit each application.

A wide variety of accessories are offered to fit the automation needs of the user, such as; auto raise tilt probes, slack cable and full up limit switches, the "Deadfall", cord reels, brake motors, and remote control just to name a few. DCL will meet or exceed your bulk loading needs.

Here is a small list of some of the loadout facilities that are using DCL Heavy Duty Loading Spouts.

*Holnam  
Holcim Bangladesh  
UltraTech - Rajula  
UltraTech - Jafrabad*


*ACC - Damodar  
FLSMIDTH  
Penna cement  
Cormanadal Fertilizer*

*Alcoa Aluminum  
Colonel Terminals  
IC Rail Marine Terminal  
Penoles*


*Allis Minerals  
CSX  
Koch Industries  
Port of Longview*

*Alpart  
Great Lakes Carbon  
Lafarge Alpena Port  
Port of Tianjin*

The spout discharge is fitted with level sensing probes that measure the product pile and automatically raise the spout as the pile height increases. The spout can be connected to a dust collector for purposes of evacuating the dust created while loading. Most lumpy products can be successfully loaded with the standard rubber skirted discharge. Products that are considered extremely dusty can be successfully loaded with use of the "Deadfall" discharge accessory.

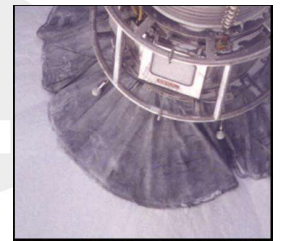

Integral heavy duty spout drive assembly.

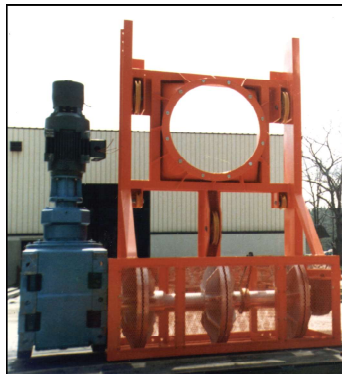

Model OV58 with combination boom and telescopic airslide for alumina loading.



Visit Our Website!  
[www.dclbulktech.com](http://www.dclbulktech.com)





Dust free grain loading into barges.



Multiple spout loading system for loadout of calcined coke.




Dust free dry phosphate loading into ships.

## THE DCL "DEADFALL"





Until the advent of the DCL "DeadFall" dust suppressor, the choice for dust suppression when loading extremely dusty materials was limited to mechanized choke type devices. The DCL "DeadFall" mounts to the bottom of a standard loading spout and is contained within a housing incorporating counterweighted bleed air dampers and product plug relief doors. The unique features of this device are that it has no moving parts, requires virtually no maintenance, and is impervious to wear.

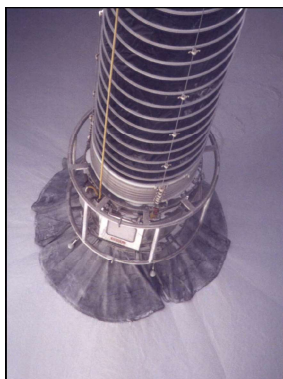

Our field proven design has outperformed the best that the industry has had to offer. Products such as alumina, bentonite, calcined coke, phosphate rock, sodium sulfite, soda ash, potash, and magnesium oxide are now loading into ships at high rates, virtually dust free, and have far exceeded our customers expectations. Installation costs have shown to be recouped within a year of operation in product recovery as well as in reduced maintenance and service costs.

A. Normal Loading



B. Plug Relief Doors in Action

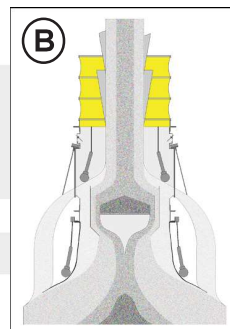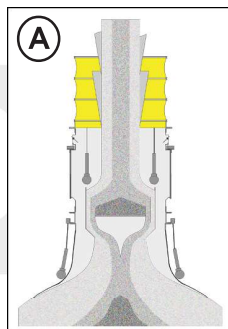

Stockpiling of coal with use of a tripper conveyor.




Loading aerated cement into barges dust free.

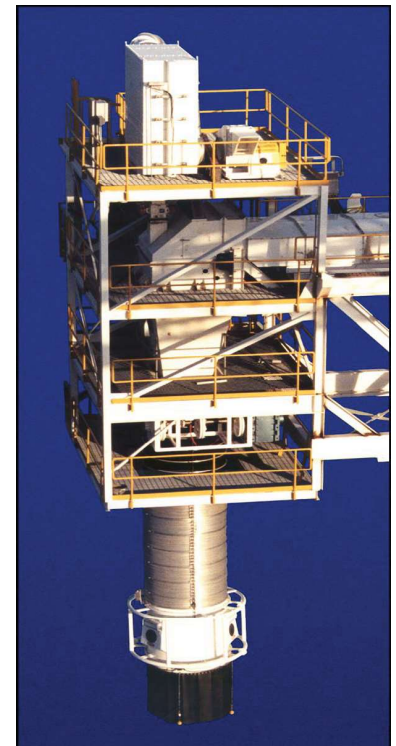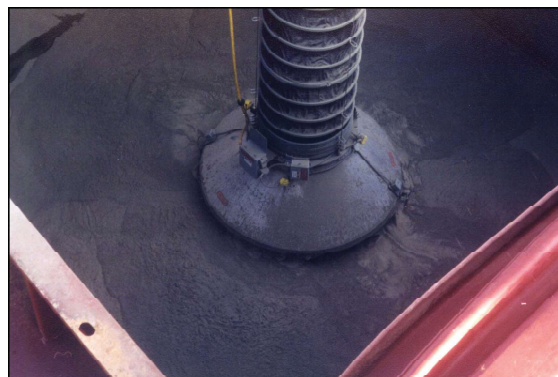

Unique OV66HD with 100 feet of travel loading extremely dusty kaolin clay.

Visit Our Website!

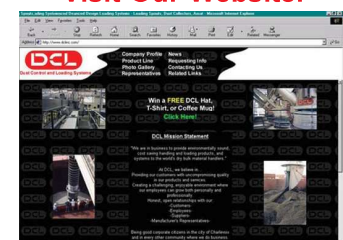


[www.dclbulktech.com](http://www.dclbulktech.com)



## REFERENCES - INDIA

### HEAVY DUTY LOADING SPOUTS - SHIP LOADING

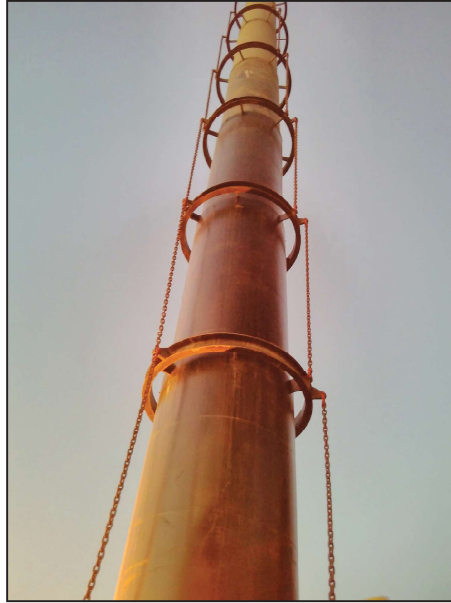

**DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



# **Loading Spout Positioners ▼**

## **▶ SINGLE DIRECTION MODELS**

HPS2; HPS4; HPS6

## **▶ ROTARY MODELS**

HPSR2; HPSR4; HPSR6

## **▶ DUAL DIRECTION MODELS**

HPD1X1; HPD2X2; HPD2X4; HPD2X6

## **▶ SWING ARM POSITIONER ARM MODELS**

SAP

## **▶ ARTICULATING POSITIONING ARM MODELS**

APA

## **▶ SMARTLOADER MODELS**

HPDSL1X1; HPDSL2X2; HPDSL2X4; HPDSL2X6; SAPSL; APASL

## Loading Spout Positioners



### LOADING SPOUT POSITIONERS

Loading spout positioners increase speed and efficiency in any loading operation. Positioners are used in conjunction with standard duty loading spouts at truck and railcar loadout facilities. Model HP positioners virtually eliminates vehicle re-spotting once in the loading station.

All HP models are available in vent-thru and non vent-thru styles. The vent-thru style eliminates the need of venting the spout below with cumbersome duct work. The dust is drawn through the spout and positioner and can be vented with typical duct work to a central dust collector or DCL model CFM compact filter module can also be mounted directly about the spout positioner to eliminate dust work completely. A choice of construction materials allow handling of all types of products; fine, granular, lumpy, abrasive, corrosive, and sanitary applications.

### HPS SINGLE DIRECTION POSITIONER

Single direction positioners are used to move standard duty loading spouts horizontally in the X axis when loading trucks or railcars. Single direction positioners allow the driver to stop the vehicle in the designated loading area without having to worry about being in the center of the loading station. The loading spout can then be positioned directly above of the vehicle hatch by moving it left or right. DCL offers a selection of single direction positioners that provide horizontal travels from 2 feet [610 mm] up to 6 feet [1.8 m].

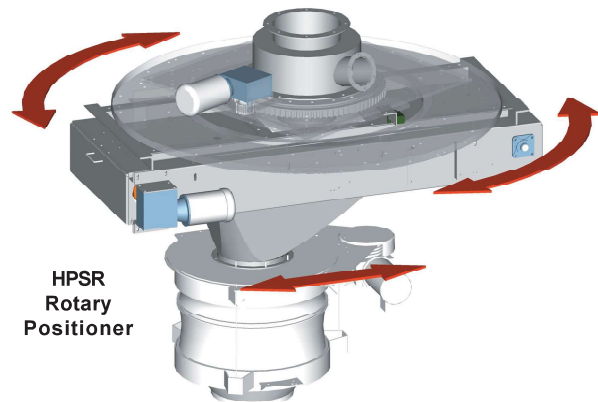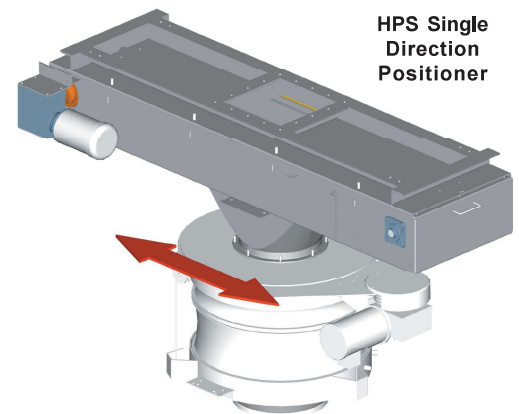


### HPSR ROTARY POSITIONER

Rotary positioners are used to move standard duty loading spouts horizontally in a radial axis when loading trucks or railcars. Rotary positioners allow the driver to stop the vehicle in the designated loading area without having to be precise. The loading spout can then be positioned directly above of the vehicle hatch. DCL offers a selection of rotary positioners that provide radial horizontal travels from 4 feet [1.2 m] in diameter up to 12 feet [3.6 m] in diameter.

### HPD DUAL DIRECTION POSITIONER

Dual direction positioners are used to move standard duty loading spouts horizontally in the X and Y axis when loading trucks or railcars. Dual direction positioners allow the driver to stop the vehicle in the designated loading area without having to be precise. The loading spout can then be positioned directly above of the vehicle hatch. DCL offers a large selection of dual direction positioners that provide horizontal travels up to 6 feet [1.8 m] by 2 feet [610 mm].

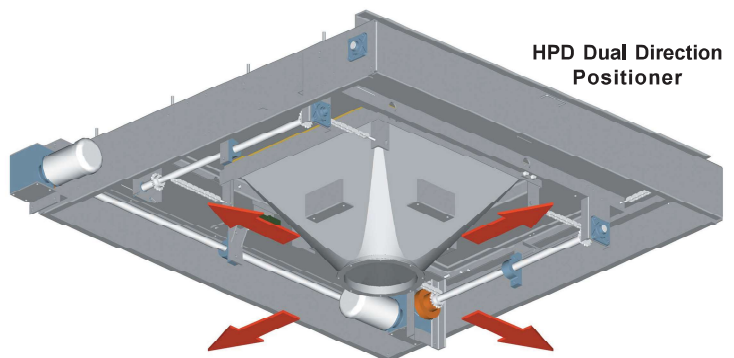


### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)  
Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India  
Phone : +91-40-23093888 (Board Line)  
e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)  
URL : [www.dclbulktech.com](http://www.dclbulktech.com)

## SAP SWING ARM POSITIONER

Swing arm positioners are versatile and efficient. This positioner is ideal when vehicle clearance is a concern. The SAP has the ability to swing out of the way of the truck or railcar as it is entering the load bay. Once the vehicle has stopped the positioner can swing into its loading position. Swing arm positioners can also be configured to load multiple hatches and/or multiple railcars.

DCL offers a selection of swing arm positioners that provide a swing radius of up to 16 feet [4.1m]. Conveying arms can be provided as aeration conveyor, en masse, and screw conveyor configurations.

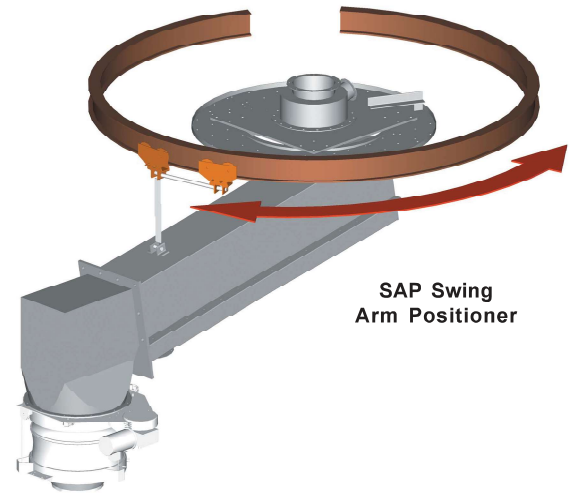


SAP Swing Arm Positioner

## APA ARTICULATING POSITIONING ARM

Articulating positioning arms increase speed and efficiency in any loading operation. APA positioners are used to move standard duty loading spouts horizontally in the X and Y axis when loading trucks or railcars. Articulating positioning arms facilitate multiple hatch locations and eliminate vehicle re-spotting once in the loading station.

DCL offers a large selection of articulating positioning arms that provide horizontal travels up to 60 feet [18.3 m] by 6 feet [1.8 m]. Conveying arms can be provided as aeration conveyor, en masse, and screw conveyor configurations.

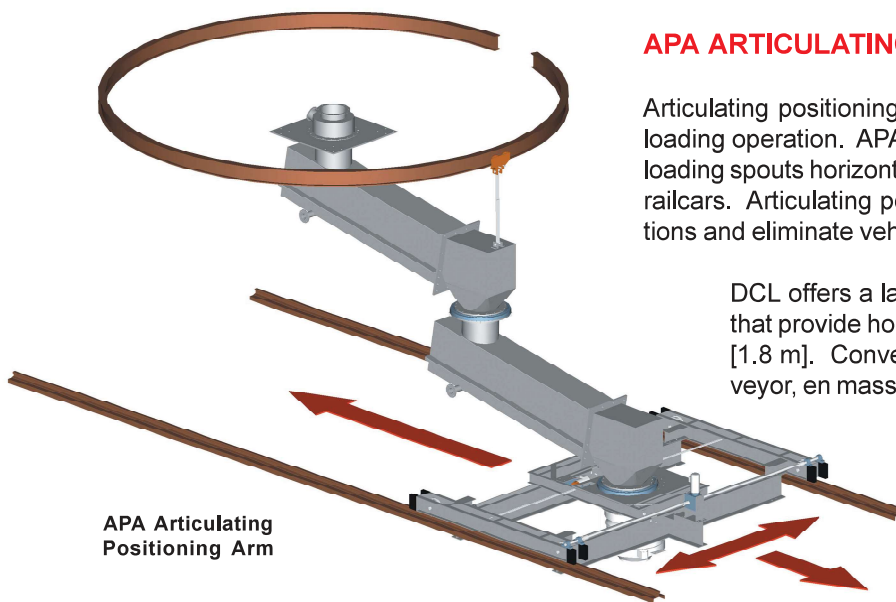

APA Articulating Positioning Arm


## SMARTLOADER

DCL is proud to announce its fully automatic, unattended bulk loading station for high speed filling of dry, dusty materials into enclosed vehicles.

The SmartLoader utilizes a patented vision system that scans the top of the vehicle. Any open hatch or series of open hatches are automatically located, measured, and qualified. The multispeed positioner provides a fast scanning speed to minimize loading cycle times.

A unique articulating positioning arm is used to move the loading spout within a designed loading area. A single spout can cover a loading area of up to 60 feet [18.3 m] by 6 feet [1.8 m] for center and side hatch railcars. A typical truck loading station would cover a loading area of 36 feet [11 m] by 2 feet [610 mm]. Dual direction positioners can also be utilized to keep costs down when semi truck trailers only are being loaded.

For more detailed information regarding the SmartLoader please see our case history brochure "Technology Breakthrough Fully Automated Loadout Terminal" PUBc-0602-CH03.

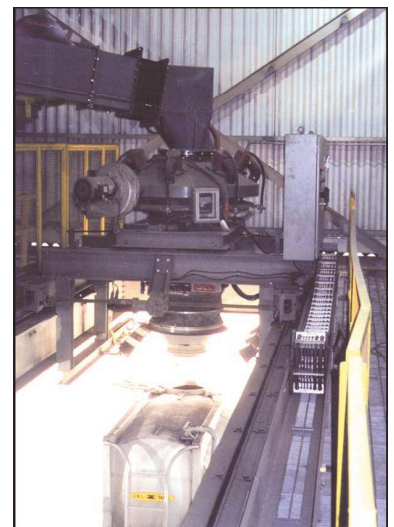

**SMART  LOADER®**





Dust Control and Loading Systems

*Leaders in Innovative Bulk Loading Systems Design*

## Reference-Loading Spouts

### Cement/Clinker/Flyash Loading Spouts



#### **DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

# **AERATION EQUIPMENT ▼**

## **▶ AERATION COVEYOR MODELS**

**FC6; FC8; FC10; FC12; FC14; FC16; FC18; FC20; FC22; FC24; FC26;  
FC28; FC30; FC32; FC34; FC36**

## **▶ AERATION BIN BOTTOM MODELS**

**FBB2; FBB3; FBB4; FBB5; FBB6; FBB8; FBB10; FBB12; FBB14; FBB16**

## **▶ AERATION LUMP TRAP MODELS**

**FCLT6; FCLT8; FCLT10; FCLT12; FCLT14; FCLT16; FCLT18; FCLT20;  
FCLT22; FCLT24; FCLT26; FCLT28; FCLT30; FCLT32; FCLT34; FCLT36**

## **▶ AERATION TROUGH**

**FT6; FT8; FT10; FT12; FT24**

## **▶ AERATION SILO PENETRATION ADAPTOR**

**SPA6; SPA8; SPA10; SPA12; SPA14; SPA16; SPA18; SPA20; SPA22;  
SPA24; SPA26; SPA28; SPA30; SPA32; SPA34; SPA36**

## **▶ ROTARY THROTTLE VALVE**


**RTV6; RTV8; RTV10; RTV12; RTV14; RTV16; RTV18; RTV20; RTV22;  
RTV24; RTV26; RTV28; RTV30; RTV32; RTV34; RTV36**

## **▶ VERTICAL SLIDE GATE VALVE**

**VSG6; VSG8; VSG10; VSG12; VSG14; VSG16; VSG18; VSG20; VSG22;  
VSG24; VSG26; VSG28; VSG30; VSG32; VSG34; VSG36**

## Aeration Conveying Equipment

**CONVEYORS ● BIN BOTTOMS ● LUMP TRAPS  
TROUGHS ● SILO PENETRATION ADAPTORS  
ROTARY THROTTLE & VERTICAL SLIDE GATE VALVES**

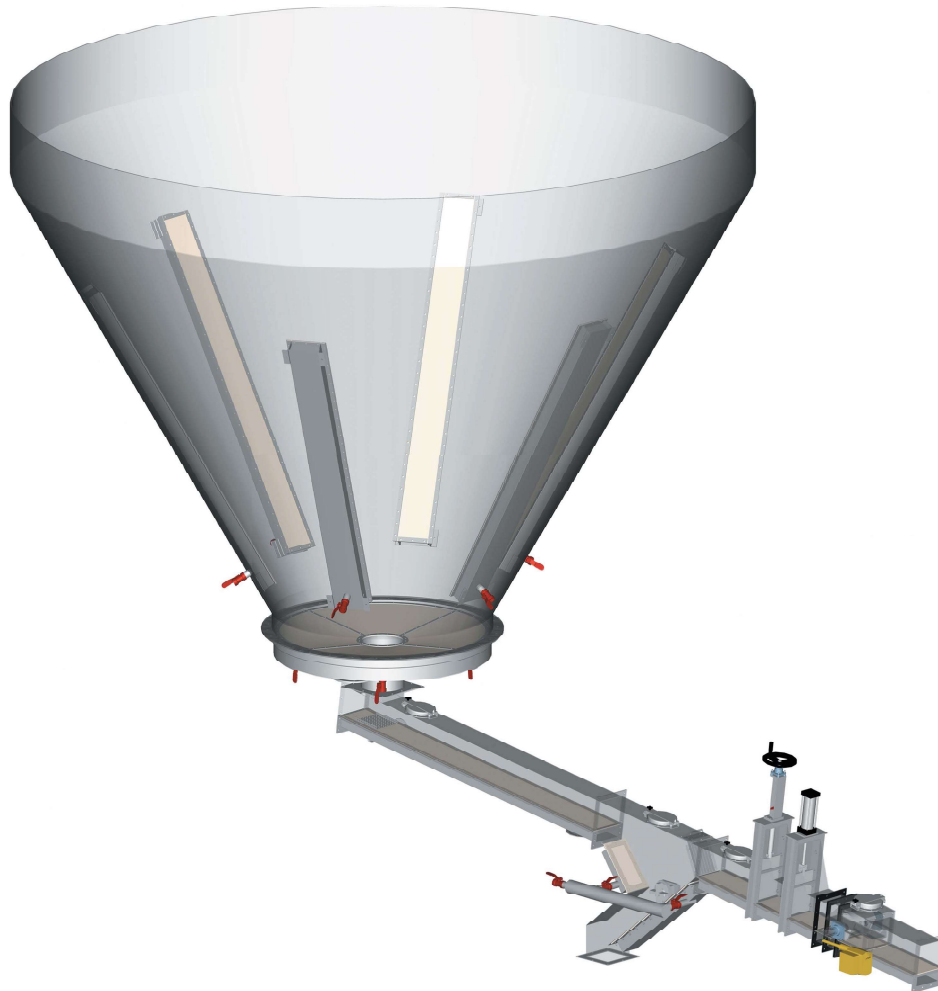

**ADIPIC ACID, ALUMINA, BENTONITE, BARIUM SULFATE, BAUXITE, CALCIUM CARBONATE,  
CALCIUM PHOSPHATE, CARBON BLACK, PORTLAND CEMENT, CLAYS, PULVERISED COAL, DOLOMITE,  
FELSPAR, FLOUR, FLOURSPAR, FLY ASH, FULLERS EARTH, GYPSUM, IRON POWDER, KAOLIN CLAY, LIME,  
PULVERIZED LIMESTONE, MAGNESIUM OXIDE, MAGNETITE, MAGNESITE, PULVERIZED ORES, PERLIGHT DUST,  
PETROLEUM COKE, PHOSPHATE DUST, PLASTIC POWDER, PVC RESIN, POTASH, POZZOLAN, PYROTOL,  
FOUNDRY SAND, SEMOLINA, SILICA, SODA ASH, SODIUM BICARBONATE, SODIUM SULFATE, STARCH,  
STUCCO, TALC, TEREPHALIC ACID, WHITING, ZINC OXIDE**

**DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)





Aerated bin bottom discharging into a conveyor with slide gate valves.



Aerated distribution box with four discharges.



Aerated lump trap with slide gate valve.

Visit Our Website!  
[www.dclbulktech.com](http://www.dclbulktech.com)



## AERATION EQUIPMENT OVERVIEW


Under normal conditions a powder runs down a chute only when the slope exceeds the natural angle of repose of the powder. A fluidized powder however, runs down a chute which has an angle much less than the natural angle of repose of the powder. The principle of air gravity conveying involves the reduction of the natural angle of repose of a pulverized material to a fluidized angle which is slightly less than the angle of declination of the conveyor. This is accomplished by passing low pressure air through a porous membrane and into a bed of pulverized material.

A large variety of materials are handled on aeration conveyors regardless of their abrasive nature or bulk density. The only criteria is particle size and moisture. Generally, a product should have a particle distribution of 100% through a 20 mesh screen. It is possible to convey coarser materials provided there is a greater percentage of fine material to fill the voids. Free moisture content should be below 1%, however materials with higher moisture contents have been conveyed. With some materials, the characteristics of particles may make aeration impossible or uneconomical. A powder that can be fluidized usually possess the characteristic of flowing freely through the fingers, feeling clean and dry, and not flaky or fibrous.



## AERATION CONVEYORS

Aeration conveyors are used to convey products from point A to point B by using aeration and gravity. Minimum suggested conveyor angle is 8 degrees, but may be as low as 6 degrees depending on product material type. Turning boxes, headchutes, and distribution boxes are available to use in conjunction with aeration conveyors.

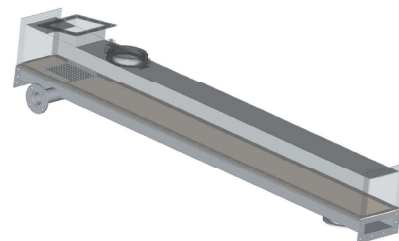


DCL offers a large selection of aeration conveyors from 6 inches [152 mm] wide up to 36 inches [914 mm] wide and conveying capacities up to 1000 cubic feet per minute [28.3 m<sup>3</sup>/min]. Conveyors also are available in a high top or low top design allowing for maximum flow rate or minimum head room depending on the application.



## AERATED LUMP TRAPS

Aeration lump traps are a ideal when large lumps are present in material. Lumps are generally created in the silo by moisture and are typically unacceptable for the consumer's vehicle being loaded. The lump trap eliminates large lumps by creating a gravity trap in-line with a aeration conveyor. This is accomplished by passing low pressure air through a overlapping configuration of porous membrane media and into the bed of the material being handled. Heavy lumps fall and are caught in the bottom of the lump trap which automatically empties using a level sensor accompanied by a series of slide gate valves.

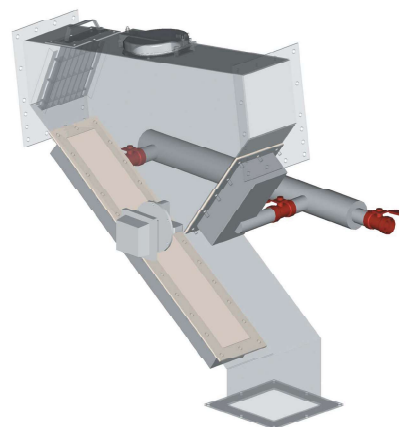

DCL offers a selection of aeration lump traps from 6 inches [152 mm] wide up to 36 inches [914 mm] wide and conveying capacities up to 1000 cubic feet per minute [28.3 m<sup>3</sup>/min]. Lump traps also are available in a high top or low top design allowing for maximum flow rate or minimum head room depending on the application.





## AERATED BIN BOTTOMS AND TROUGHS

Aeration bin bottoms are used to promote consistent product withdrawal from large diameter flat or conical bottom storage silos.

DCL offers a large selection of aeration bin bottoms from 2 feet [610 mm] in diameter up to 16 feet [4.9 m] in diameter. Bin bottoms are also available with custom discharge configurations allowing for multiple conveyor runs from one silo.

Troughs are typically mounted inside the conical section of the silo and are equally spaced along a 360 degree pattern. However they can also be used in flat bottom silos and only require a 6 degree slope from the inner silo wall of the silo to the discharge point.

DCL offers a selection of aeration troughs from 6 inches [152 mm] wide up to 24 inches [610 mm] wide.

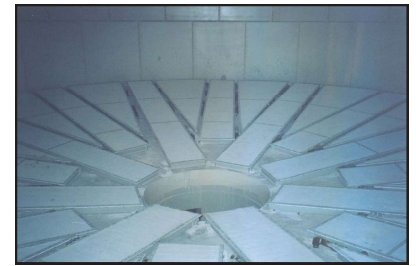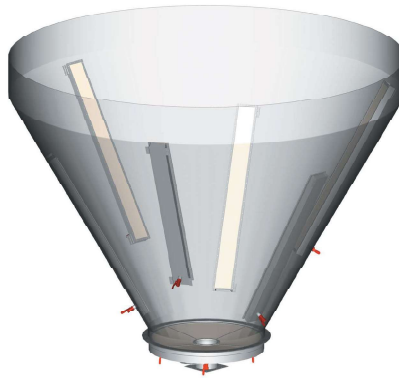


30'-0" diameter fully aerated flat bottom silo using aeration troughs.



## SILO PENETRATION ADAPTORS

Aeration silo penetration adaptors allow material to be withdrawn from the side of any silo. They can be easily retrofitted in the field to existing silos when silo bottom discharges are not possible.

DCL offers a large selection of aeration silo penetration adaptors from 6 inches [152 mm] wide up to 36 inches [914 mm] wide and conveying capacities up to 1000 cubic feet per minute [28.3 m<sup>3</sup>/min].

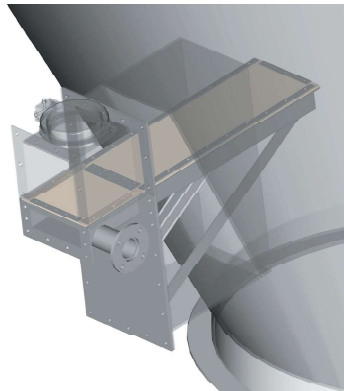



Vertical manual and pneumatic slide gate valve.



## FLOW CONTROL VALVES

Rotary throttle valves are an excellent means to control material flow while air gravity conveying.

The rotary throttle valve uses a rotary parabolic blade that allows for a low profile design that delivers precise flow control. A 4-20mA electric actuator is used to actuate the valve when real time infinite positioning is required. If real time infinite positioning is not required DCL uses a pneumatic actuator with a 3 position positioning package.

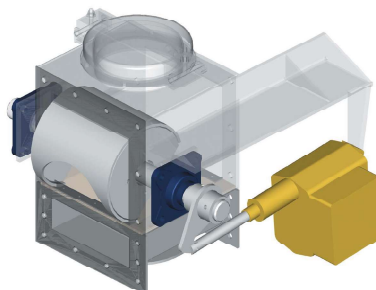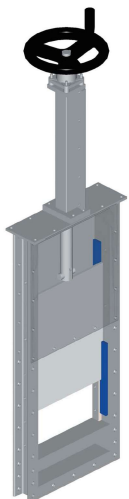

Aeration conveyor run.

Vertical slide gate valves are used in applications where a material flow shut-off is required in air gravity conveying applications. The vertical slide gate uses a Blanchard ground chamfered blade. Not only can it be used to shut-off material flow, it can be used as a flow control.

Visit Our Website!  
[www.dclbulktech.com](http://www.dclbulktech.com)

# Shut-Off Valves ▼

## ▶ SLIDE GATE VALVE MODELS

SV6; SV8; SV10; SV12; SV14; SV16; SV18; SV20; SV22; SV24;  
SV30; SV36

## ▶ CURVED BLADE VALVE MODELS

CBV6; CBV8; CBV10; CBV12; CBV14; CBV16; CBV18; CBV20;  
CBV22; CBV24; CBV30; CBV36

## ▶ TIPPING VALVE MODELS

TV6; TV8; TV10; TV12; TV14; T16; TV18; DTV6; DTV8; DTV10;  
DTV12; DTV14; DTV16; DTV18



## SV Slide Gate Valve

### SLIDE GATE VALVE


DCL's Model SV Slide Gate Valves are designed to shut off product flow from outlets of storage bins, silos, conveyors, and other discharge points handling dry bulk materials.

These rugged heavy duty slide gate valves are available in standard sizes ranging from 6 inches to 36 inches square. Sizes larger than 36 inches, rectangular, and special configurations including dual opposing blade and dewatering designs are available on a custom build basis.

A choice of construction materials allow handling of all types of products and applications; fine, granular, lumpy, abrasive, corrosive, or sanitary.

### FEATURES

The valve frame is constructed from heavy duty 3/16 inch steel with a hardened blanchard ground blade which rides on cam rollers or solid guides. Actuation of Slide Gate Valves can be accomplished in many ways; pneumatically for fast action, hydraulically for power, electrically for precise positioning, and manually for maintenance and flow control.

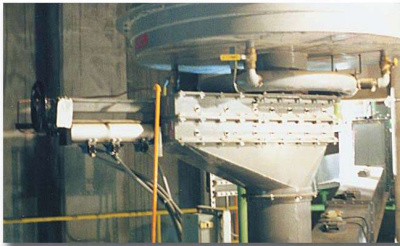



Blade seals are selected according to the material being handled and are available to suit any application. A molded urethane inlet liner provides an ideal blade seal when handling granular products. Additional frame seals are available and should be used when handling fine dusty material. Adjustable seals are also available to virtually eliminate the need for seal replacement. These seals are adjusted from the outside of the valve frame, which makes it unique to the industry.

All SV Slide Gate Valves are equipped with a dust tight transition unless mounted directly above another valve. This transition is recommended when handling fine dusty material.

### ULTIMATE FLOW CONTROL PACKAGE

The ultimate flow control package consists of a manually actuated and a powered Slide Gate Valve. With this configuration you can preset product flow with the manual valve and use the powered valve as a shut off.

In the case of product maintenance or equipment failure you can manually shut off the flow valve and service any equipment beneath it.

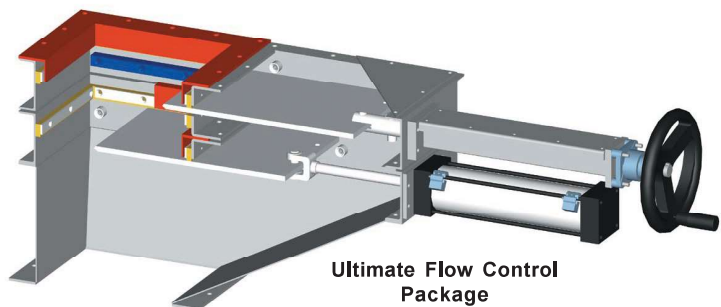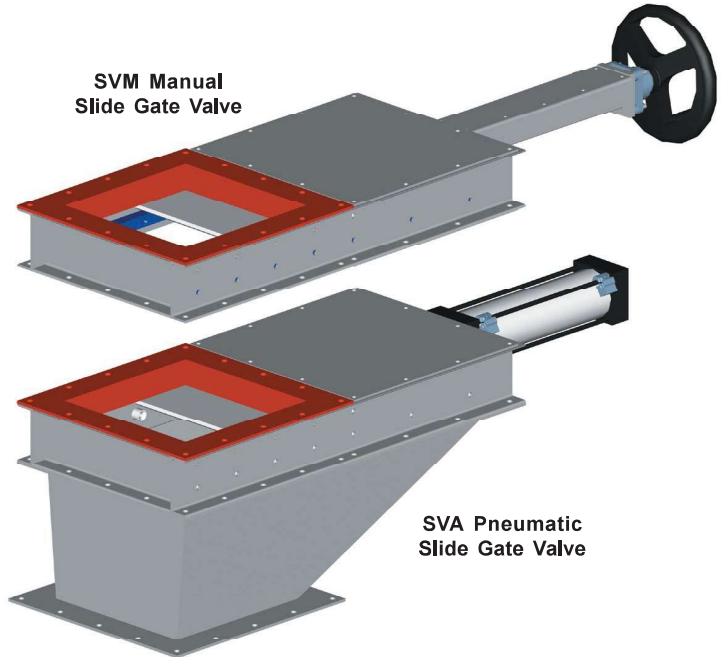

#### **DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)


## CB Curved Blade Valve

### CURVED BLADE VALVE

DCL's Model CB Curved Blade Valves are designed to cut off product flow from outlets of storage bins, silos, conveyors, gravity flow chutes and other discharge points handling dry bulk materials.

These rugged heavy duty curved blade valves are available in standard sizes ranging from 6 inches to 36 inches square. Sizes larger than 36 inches, rectangular, and special configurations including hardened liners are available on a custom build basis.

A choice of construction materials allow handling of all types of products; fine, granular, abrasive, corrosive, and sanitary applications.

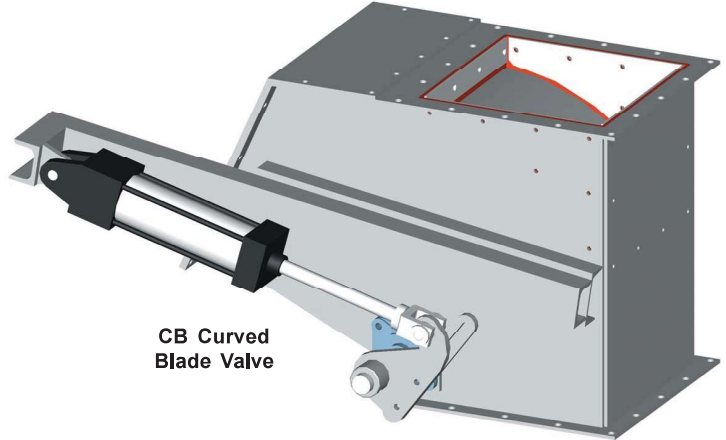

CB Curved  
Blade Valve




### FEATURES

The CB Curved Blade Valves are fast acting, tight sealing, and very effective for regulating flow rates. The curved blade valve should only be used when handling fine or granular materials and not materials containing a large percentage of lumps.

The CB housing is constructed of plate steel with cross member supports on larger sizes. The reinforced curved blade pivots on two flanged bearings allowing it to open and close with ease. Actuation of Curved Blade Valves can be accomplished in many ways; pneumatically for fast action, hydraulically for power, electrically for precise positioning, and manually with a chain wheel or lever.

The seals on the Curved Blade Valve are designed to eliminate product leakage when the blade is in the shut off position. The seals are mounted to the CB housing instead of the blade allowing for easy access and replacement. Blade seals are selected according to the material being handled and are available to suit any application.

nate product leakage when the blade is in the shut off position. The seals are mounted to the CB housing instead of the blade allowing for easy access and replacement. Blade seals are selected according to the material being handled and are available to suit any application.

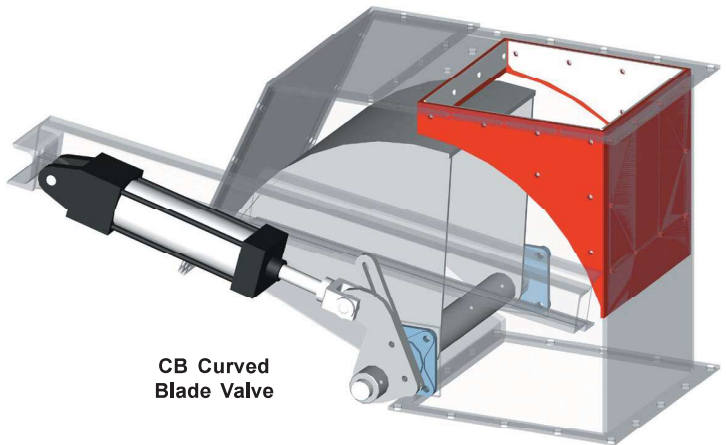

CB Curved  
Blade Valve

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)  
Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India  
Phone : +91-40-23093888 (Board Line)  
e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)  
URL : [www.dclbulktech.com](http://www.dclbulktech.com)



Dust Control and Loading Systems.


*Leaders in Innovative Bulk Loading Systems Design*

## TV Tipping Valve


### TIPPING VALVE

DCL's Model TV Tipping Valves are designed as a airlock and to monitor product flow from outlets of dust collectors, filter modules, and other discharge points handling dry bulk materials.

Tipping Valves are very effective inexpensive airlocks. Actuation of tipping valves can be accomplished in many ways; pneumatically for fast action, electrically for precise positioning, and by gravity. The seals are designed to eliminate product leakage when the blade is in the shut off position and act as an airlock. Blade seals are selected according to the material being handled and are available to suit any application Tipping valves can be suited to handle product at 500 degrees Fahrenheit.

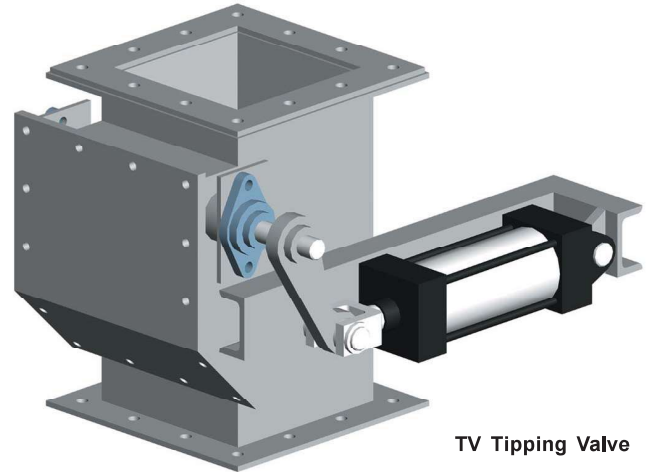

TV Tipping Valve

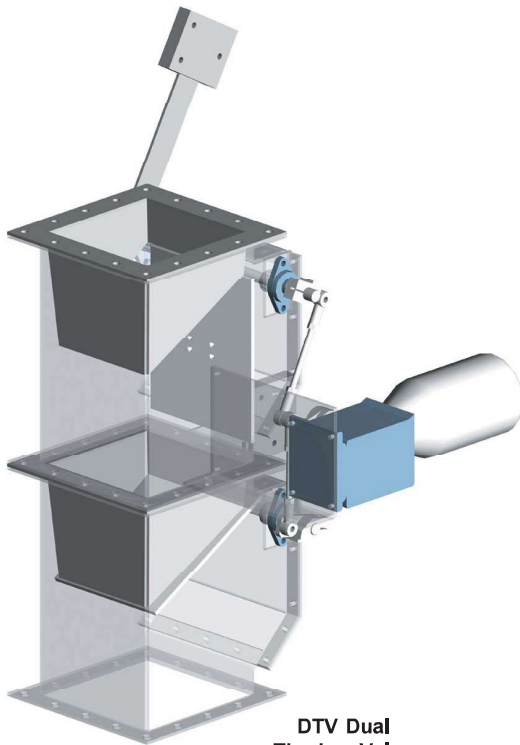

DTV Dual  
Tipping Valve

### DUAL TIPPING VALVE

DCL's Model DTV Dual Tipping Valves are designed as a airlock and to monitor product flow from outlets of dust collectors, filter modules, and other discharge points handling dry bulk materials.

A Dual Tipping Valve is actually two single Tipping Valves mounted together. This allows more product flow and offers an even better airlock. Dual tipping valves have a tandem actuator configuration which only requires one actuator to actuate each valve.

DCL offers a large selection of tipping valves from 6 inches [152 mm] square up to 18 inches [457 mm] square. Tipping valves are also available in sizes larger than 18 inches [457 mm] and in special configurations on a custom build basis.

A choice of construction materials allow handling of all types of products; fine, granular, abrasive, corrosive, and sanitary applications.

#### **DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



## FBD Flat Blade Diverter Valve

### FLAT BLADE DIVERTER VALVE

DCL's Model FBD Flat Blade Diverter Valves are designed to direct product flow from outlets of storage bins, silos, conveyors, gravity flow chutes and other discharge points handling dry bulk materials.

These rugged heavy duty flat blade diverters are available in offset, symmetrical, and triverter configurations. Standard sizes range from 6 inches to 36 inches square. Sizes larger than 36 inches, rectangular, and special configurations including hardened liners are available on a custom build basis.


A choice of construction materials allow handling of all types of products; fine, granular, lumpy, abrasive, corrosive, and sanitary applications.

### FEATURES

The FBD housing is constructed of plate steel with cross member supports on larger sizes. The reinforced blade pivots on two flanged bearings allowing it to open and close with ease. Actuation of Flat Blade Diverter

Valves can be accomplished in many ways; pneumatically for fast action, hydraulically for power, electrically for convenience, and manually with a chain wheel or lever.

The seals on the Flat Blade Diverter are designed to eliminate product leakage when the blade is in the diverted position. The seals are located at the top, sides, and bottom of the blade. Blade seals are selected according to the material being handled and are available to suit any application.

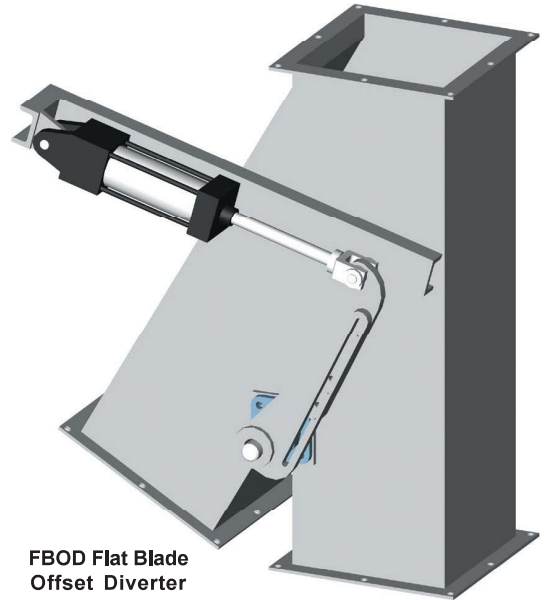


**FBOD Flat Blade  
Offset Diverter**

### MODELS AVAILABLE

The FBOD Flat Blade Offset Diverter Valve is configured to direct the product flow straight through or to one side of the diverter. Typical product outlet offsets are 30 or 45 degrees off center. One blade and actuator is used on this diverter valve.

FBSD Flat Blade Symmetrical Diverter Valves have two product outlets, each 30 or 45 degrees off center. One blade and actuator is used on this diverter valve.

The FBTV Flat Blade Triverter Valve has one inlet and three outlets. The two side product outlets are 30 or 45 degrees off the center outlet. Two blades and actuators are used on this valve.

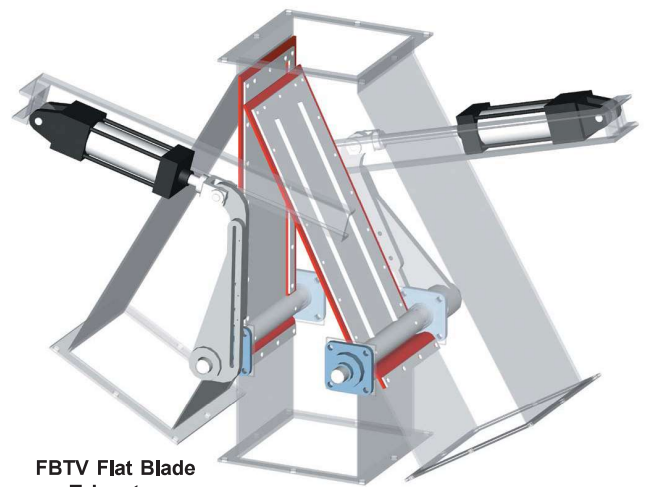

**FBTV Flat Blade  
Triverter**

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



## CBD Curved Blade Diverter Valve

### CURVED BLADE DIVERTER VALVE

DCL's Model CBD Curved Blade Diverter Valves are designed to direct and cut off product flow from outlets of storage bins, silos, conveyors, gravity flow chutes and other discharge points handling dry bulk materials.

These rugged heavy duty curved blade diverters are available in 30 and 45 degree symmetrical configurations. Standard sizes range from 6 inches to 36 inches square. Sizes larger than 36 inches, rectangular, and special configurations including hardened liners are available on a custom build basis.

A choice of construction materials allow handling of all types of products; fine, granular, abrasive, corrosive, and sanitary applications.

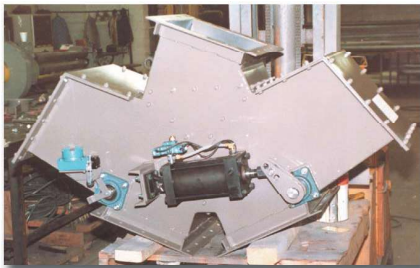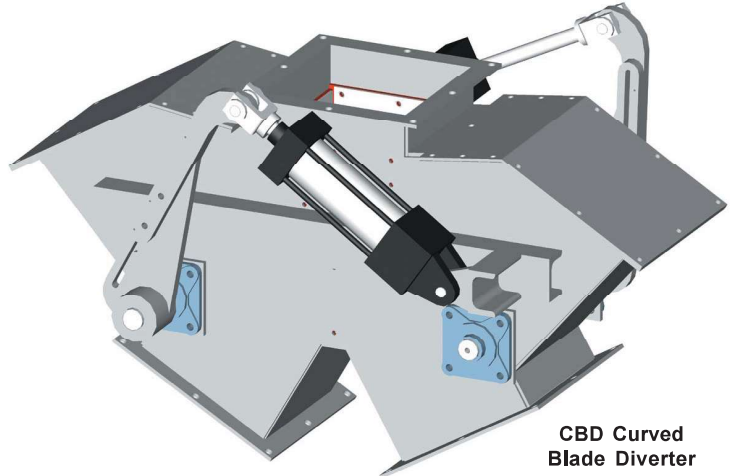


### FEATURES

The CBD Curved Blade Diverter Valves are fast acting, tight sealing, and very effective for regulating flow rates. The diverter configuration will allow not only a selection of flow to one or both legs at the same time, but will also act as a complete shut off valve. The curved blade valve should only be used when handling fine or granular materials and not materials containing a large percentage of lumps.

The CBD housing is constructed of plate steel with cross member supports on larger sizes. Each reinforced curved blade pivots on two flanged bearings allowing it to open and close with ease. Actuation of Curved Blade Diverter Valves can be accomplished in many ways; pneumatically for fast action, hydraulically for power, electrically for precise positioning, and manually with a chain wheel or lever.

The seals on the Curved Blade Diverter are designed to eliminate product leakage when the blade is in the shut off position. The seals are mounted to the CBD housing instead of the blade allowing for easy access and replacement. Blade seals are selected according to the material being handled and are available to suit any application.

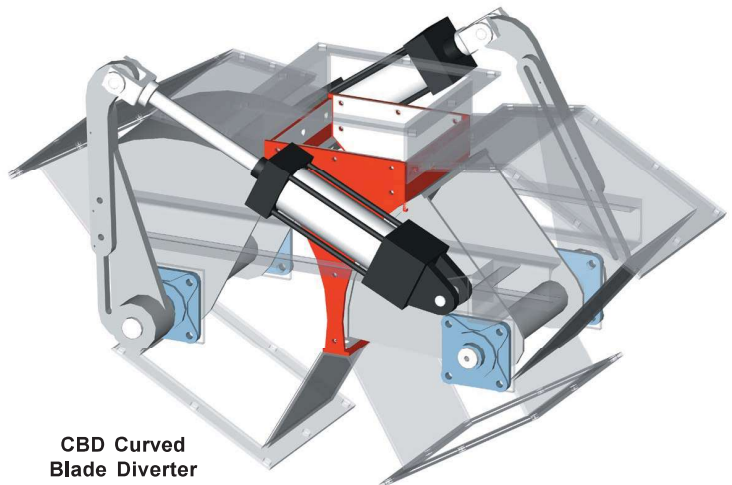

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)  
Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India  
Phone : +91-40-23093888 (Board Line)  
e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)  
URL : [www.dclbulktech.com](http://www.dclbulktech.com)

# **DUST COLLECTION EQUIPMENT ▼**

## **▶ COMPACT FILTER MODULE MODELS**

**CFM155; CFM195; CFM270; CFM330; CFM470; CFM660**

## **▶ VENTILATION MODULE MODELS**

**VMV185; VMV280; VMV375; VMV470; VMV565; VMV660; VMV750; VML85;  
VML140; VML185; VML235; VML235; VML280; VML330; VML375**

## **▶ DUST COLLECTOR MODELS**

**DC16; DC25; DC36; DC49; DC64; DC91; DC100**

## **▶ BIN VENT MODELS**


**BV16; BV25; BV36; BV49; BV64; BV91; BV100**

## Compact Filter Module

### APPLICATION

The CFM Compact Filter Module is ideal for use inline at any bulk material transfer point requiring dust control. Its low profile configuration also makes the CFM the best choice for inline filtration when integrated with a DCL Loading Spout. The flow tube can be eliminated making this unit suitable as a bin vent for any tight headroom conditions.

When used as an inline filter, product flows through a central flow tube while isolated from the upward dust entrained airflow. The collected dust is deposited back to the material being handled making the CFM Compact Filter Module an ideal cost effective package especially when compared to a free standing dust collector utilizing duct work, discharge air lock, and often a means to convey the dust back to the system.

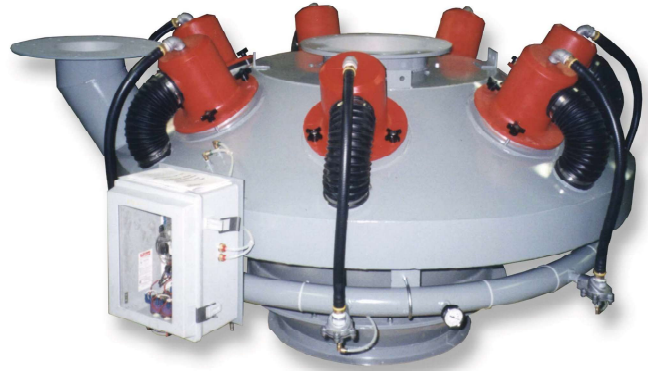


Filter replacement is performed without tools while accessible from the exterior of the unit.

### FEATURES

The exhaust fan, up to 5000 CFM is directly mounted to the assembly eliminating the need for a remote fan placement. The unique design provides internal velocities that are lower than what is normally expected from conventional designs resulting in less load on the filtration media. The filter elements are automatically cleaned during operation with a conventional 80 PSI pulse jet system. The unit can be provided with a final clean feature that is activated at the end of each loading cycle fully cleaning all elements, eliminating residuals.

### CAPACITIES

Compact Filter Modules are available in sizes from 155 to 660 square feet of filter media. Filter media is available to accommodate most applications. Pleated design, spun bonded media features a smooth surface finish with exceptional dust cake release. The filter surface is calandered and compacted to resist penetration by collected particulate. This results in better cleaning efficiency and faster return to operating airflow after the cleaning cycle than is possible with traditional media.

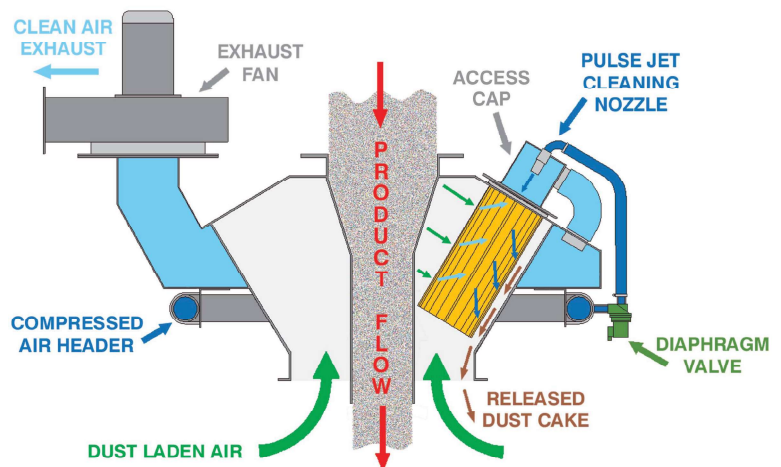

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)




## VMV Ventilation Module

### VMV VENTILATION MODULE

The VMV Ventilation Module is an excellent choice for dust control when used directly at the source. This includes conveyor head chutes, ventilation of enclosed conveyors, screeners, mixers, silos, and batching bins. The special designed pleated filter elements are sized to be easily handled and are replaced without tools.

The dust that is collected by the VMV is deposited back to the material being handled. The Ventilation Module is an ideal cost effective package especially when compared to a free standing dust collector utilizing duct work, discharge air lock, and often a means to convey the dust back to the system.

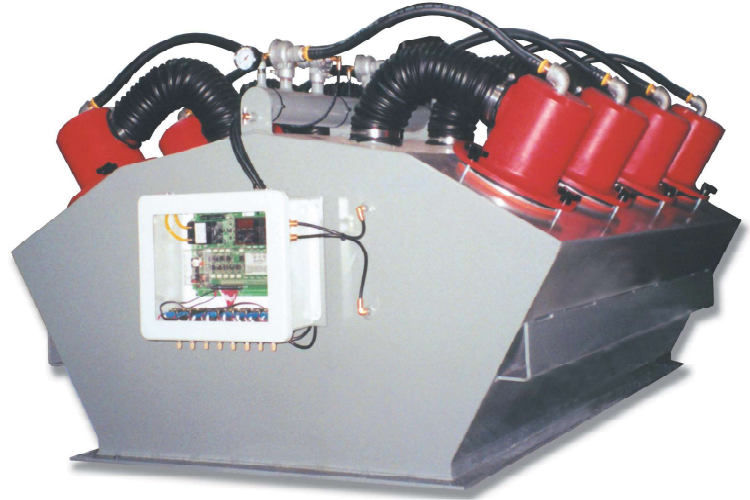


Filter replacement is performed without tools while accessible from the exterior of the unit.

### FEATURES

The exhaust fan, up to 6000 CFM is directly mounted to the assembly eliminating the need for a remote fan placement. The unique design provides internal velocities that are lower than what is normally expected from conventional designs resulting in less load on the filtration media. The filter elements are automatically cleaned during operation with a conventional 80-100 PSI pulse jet system. The unit can be provided with a final clean feature that is activated at the end of each loading cycle fully cleaning all elements, eliminating residuals.

### CAPACITIES

The VMV Ventilation Module is available in sizes from 185 to 750 square feet of filter media. Filter media is available to accommodate most applications. Pleated design, spun bonded media features a smooth surface finish with exceptional dust cake release. The filter surface is calandered and compacted to resist penetration by collected particulate. This results in better cleaning efficiency and faster return to operating airflow after the cleaning cycle than is possible with traditional media.

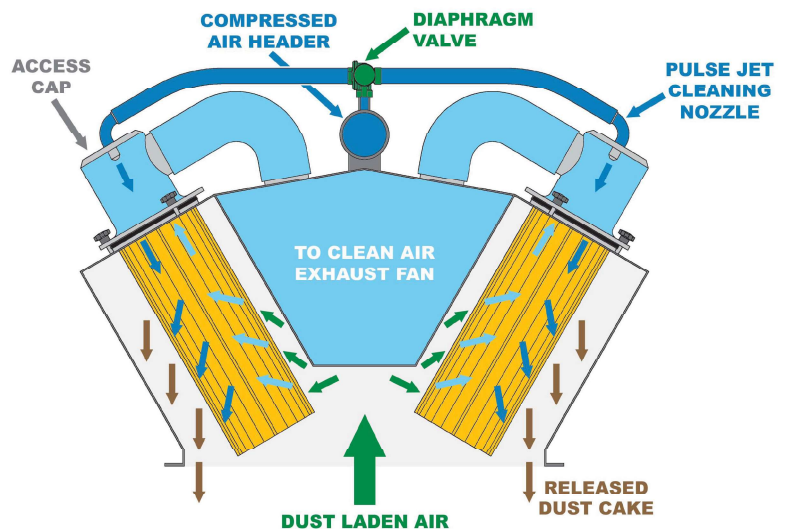

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

## References - India



**CLINKER TRUCK DUMPER STATION**



**BELT TRANSFER POINTS**



**SILO TOP**



**BELT TRANSFER POINTS**



**CLINKER TUNNEL TRANSFER POINTS**



**CLINKER TUNNEL TRANSFER POINTS**

**DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



## Dust Collector & Bin Vent


### DC DUST COLLECTOR

Dust collectors are typically installed at a remote location with duct work feeding to it from multiple bulk material transfer points requiring dust control. Some of the dust collector options include; platforms, railing, ladders, multiple access ports and doors.

All dust collectors are offered in top and bottom filter removal designs as well as walk in clean air plenums. Exhaust fans can be mounted to the dust collector or next to it. A wide variety of filter media choices are available to suite most dry particle filtering requirements.



Dust collector with access platform and safety hand rail.

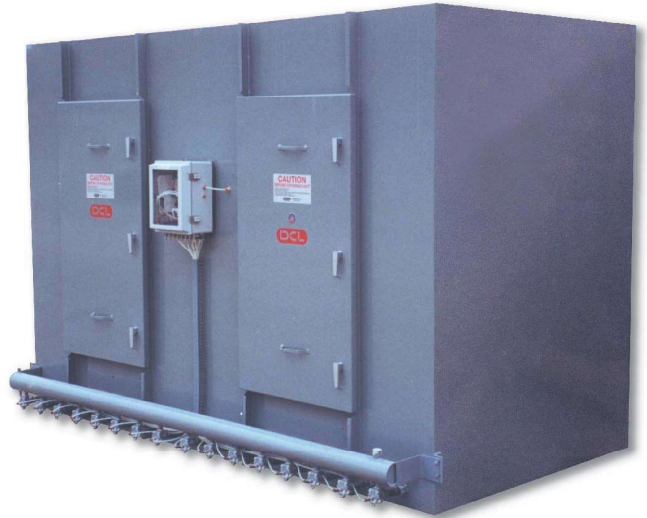


Bin vent with walk in clean air plenum.

### BV BIN VENT

Bin vents are similar in design to dust collectors, except they do not have a collection hopper mounted to the bottom of the unit. Bin vents are typically installed on top of storage silos. They are typically used to vent storage silos, but can also accept remote duct work. Some of the bin vent options include; platforms, railing, ladders, multiple access ports and doors.

All bin vents are offered in top and bottom filter removal designs as well as walk in clean air plenums. Exhaust fans can be mounted to the bin vent or next to it. A wide variety of filter media choices are available to suite most dry particle filtering requirements.

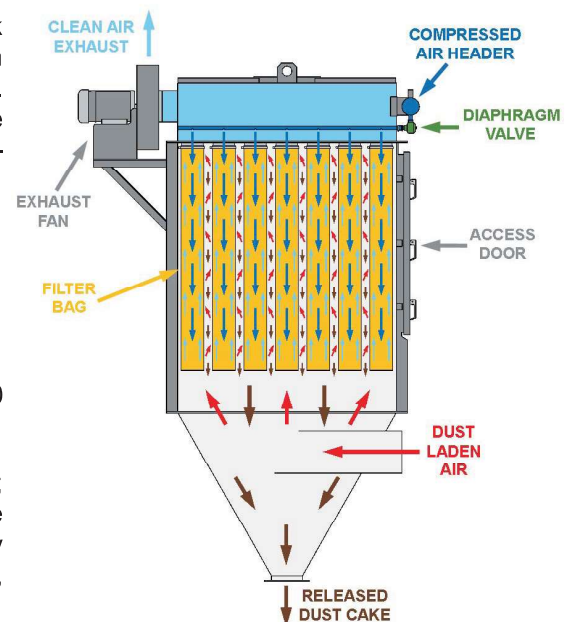

### FEATURES

DCL offers a large selection of dust collectors and bin vents up to 3000 square feet of filter media. Exhaust fans can be sized up to 18000 CFM.

A choice of construction materials allow handling of all types of products; fine, granular, lumpy, abrasive, corrosive, and sanitary applications. A choice of electrical options are also available allowing for installation in almost any environment; NEMA 4, NEMA 4X, NEMA 7, NEMA 9, 120V/220V control, 460V/415V power, etc.

#### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

## Bag Fill Station

### BAG FILL STATION


DCL's dust free bulk bag filling stations are provided in configurations tailored for a specific bag and are designed to accommodate a full range of bag sizes. The systems use high accuracy scales with manual sequence or PLC controls. The bag fill station comes in two typical designs, a two post and four post.

A wide variety of options allow for manual or fully automatic operation. Bag filling options include; automatic strap release, powered and gravity, roller conveyors, empty pallet dispenser, full and dribble feed product flow control valve, drum and box filling adapters with simultaneous weighing and densifying and integral filters.



DCL offers a wide variety of bag fill stations that can handle bags from 25 to 60 cubic square feet.

A choice of construction materials allow handling of all types of products; fine, granular, lumpy, abrasive, corrosive, and sanitary applications. A choice of electrical options are also available allowing for installation in almost any environment; NEMA 4, NEMA 4X, NEMA 7, NEMA 9, 120V/220V control, 460V/415V power, etc.

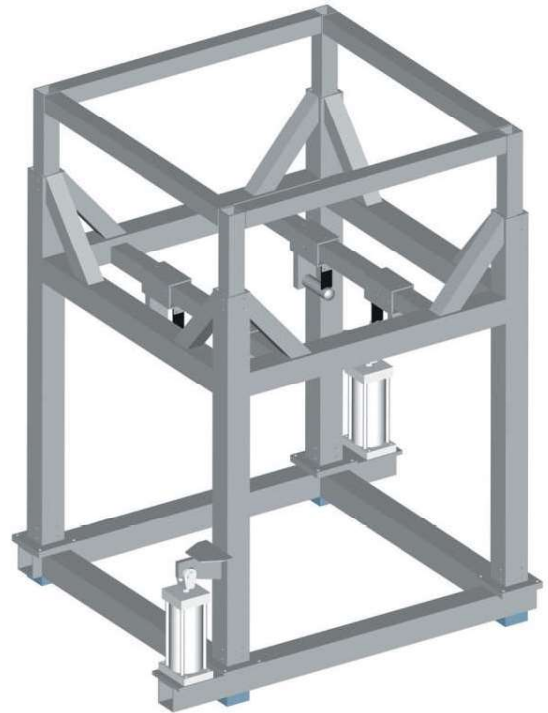


### BAG FILL NECK

Bag filling necks are typically used in conjunction with a bag filling station. The bag is sealed around the bag filling neck and

the bladder on the BFN is then inflated allowing for a complete dust tight seal. The bag filling neck dust outlet must be ducted to a dust collector in order to pull the air and dust from the bag.

A choice of construction materials allow handling of all types of products; fine, granular, lumpy, abrasive, corrosive, and sanitary applications. A choice of electrical options are also available allowing for installation in almost any environment; NEMA 4, NEMA 4X, NEMA 7, NEMA 9, 120V/220V control, 460V/415V power, etc.

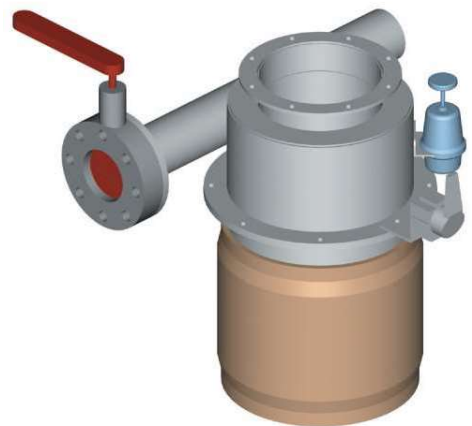

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



## System Controls

### PUSH BUTTON CONTROL PANELS

Push button control panels from small two button spout control to sloped top enclosures for complete loadout system control. Push button pendants, wireless or conventional hard wired with 20' of SO cord.

### PLC CONTROL PANELS

PLC (Programmable Logic Control) panels sized to match the system providing less field wiring and improved maintenance and trouble shooting ability. VPN (Virtual Private Network) connection can be added to a PLC system to allow DCL to remotely access and troubleshoot, allowing DCL the ability to make PLC changes remotely and diagnose and possibly fix a problem without having to send a field technician.



### HUMAN MACHINE INTERFACE CONTROL

HMI (Human Machine Interface) provides all the function of conventional push button control plus allows for graphic viewing of the system in operation. Also provides greater alarm indication and data logging for scheduling preventive maintenance.



### CLOSED CIRCUIT CAMERA CONTROL

CCC (Closed Circuit Camera) system includes required camera(s) and viewing monitor to allow a truck driver to align their truck hatch with the loading spout as they drive into the loadout station.




### MOTOR STARTER PANELS

Motor starter panels, either stand alone or incorporated with the push button control panel or PLC panel, providing motor control for all of the systems three phase motors.



### LOADOUT AUTOMATION

The SmartLoader vision system is at the center of our recommended plant loadout automation system design. The SmartLoader Vision is a PC based system which can be integrated with bucket elevators, silo volume, flow control, truck scales, and the plant billing system. This allows for a truck driver to never leave his truck and drive away with a receipt in hand.

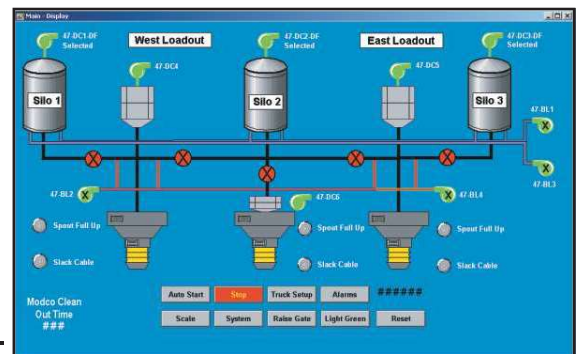

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)  
Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India  
Phone : +91-40-23093888 (Board Line)  
e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)  
URL : [www.dclbulktech.com](http://www.dclbulktech.com)



## Smart Loader Vision System

### OVERVIEW

DCL is proud to announce its fully automatic, unattended bulk loading station for high speed filling of dry, dusty materials into enclosed vehicles.

The SmartLoader utilizes a patented vision system that scans the top of the vehicle. Any open hatch or series of open hatches are automatically located, measured, and qualified. The multi-speed positioner provides a fast scanning speed to minimize loading cycle times.

A unique articulating positioning arm is used to move the loading spout within a designed loading area. Dual direction positioners can also be utilized to keep costs down when similar truck trailers are being used in the same load out station.

### SMARTLOADER VISION SYSTEM

Fully automatic, unattended loading is accomplished by using the SmartLoader Vision System. The development of this system represents the final link to truly automatic loading. The top of the truck is scanned as the truck enters the station. As the open hatch is detected, a traffic light signals the driver to stop. The vision system then takes the final hatch coordinates and adjusts the loading spout positioner centering the spout to the hatch. The spout is then lowered into the hatch once the scale has captured the vehicle tare weight. When the filling cycle is complete, the spout raises. The traffic signal and exit gate then allow the driver to exit the station.



*Articulating arm positioning system.*



*Dual direction positioning system.*


The Smart Loader Vision technology requires that the loading station be enclosed with no possibility of sunlight illuminating the vehicle either by direct sunlight or reflected sunlight. Past system performance has shown that the Vision system is capable of identifying 98 percent of hatches found on common bulk hauling trucks. Some error can be attributed to the driver's inability to understand the system operation. The user is responsible for notifying truck drivers of the new system operation, written driver instruction or instructional signs outside of the loading station. The system controls and operation scheme must accommodate manual intervention on occasion due to driver error or system malfunction. The manual operating scheme can include driver or plant personnel intervention.

The Loading Spout, Positioner and Vision System are shipped assembled in a steel cradle pre-wired to a positioner frame mounted control panel containing spout and positioner motor

controls and PLC. A single Ethernet connection is required from the equipment mounted control panel to the host control system in the control room.

Factory testing is conducted prior to shipping to check out all electrical components and to preset all limit switches. This procedure greatly reduces the amount of wiring and set up required in the field. Factory technicians need only deal with Vision calibration and handshake requirements with the host system.

For more detailed application information please see "Case History: Technology Breakthrough Fully Automated Loadout Terminal" DCL publication PUBc-0609-CH03.

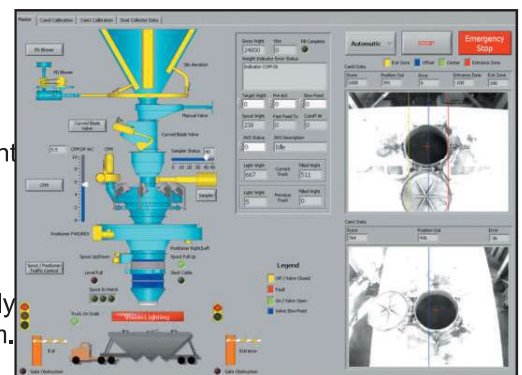

*PC display interface for dual direction positioning system utilizing SmartLoader Vision System.*

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A.)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

# **ACCESSORIES ▼**

▶ **INSPECTION HATCH**

▶ **TILT PROBE AND CONTROLLER**

▶ **PNEUMATIC LEVEL SENSOR AND CONTROLLER**

▶ **VALVE POSITIONING PACKAGE**



Dust Control and Loading Systems

Leaders in Innovative Bulk Loading Systems Design



## IH08 Inspection Hatch

### APPLICATION

DCL IH08 Inspection Hatches can be installed on bins, tanks, mobile vessels, conveyors, and any other type of bulk material handling equipment. A low profile bolt on design allows these hatches to be mounted virtually anywhere on new and existing equipment without the need for torching or welding.

### FEATURES

- Low profile bolt on assembly for easy field installation.
- Heavy duty design, constructed of carbon steel with stainless steel hardware.
- User friendly design requiring no tools to open.
- Lockable.
- Front and rear clamping for maximum seal.
- Epoxy/Urethane finish - Your choice of color for OEM customers.
- Optional 304 stainless steel construction.
- E.P.D.M. 65A Durometer seal for -50 to +250 degrees Fahrenheit (-46 to +121 degrees Celsius) service.

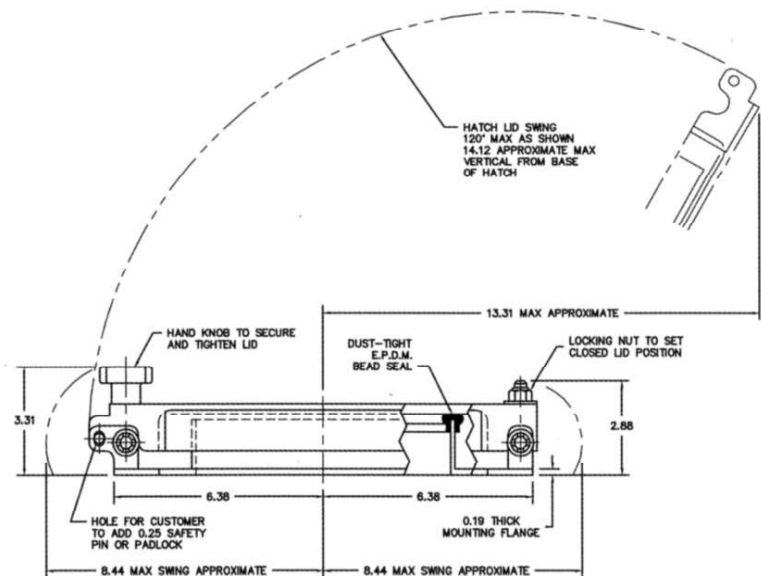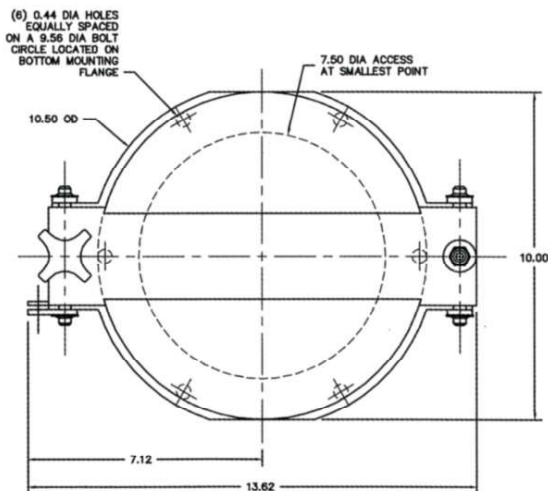

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)





Dust Control and Loading Systems

Leaders in Innovative Bulk Loading Systems Design

## TPS Tilt Probe and Controller

### APPLICATIONS

- High-level indication in trucks, rail cars, and bins, being loaded with dry bulk material.
- Automatic raise signal for loading chutes in stockpile or open truck loading.
- Plugged transfer chute alarm.
- Material flow / no flow alarm for conveyors.
- Material overshooting alarm on transfer conveyor.

### OPERATION

The **DCL Tilt Probe TPSMF** switch is totally encapsulated in a 316 stainless steel schedule 80 pipe making them extremely rugged and dependable in even the harshest environments. The normally closed mercury switch opens whenever the probe is tilted 15 degrees or more from a vertical position. The probe has a female 3/4" npt on the bottom for optional probe extensions. A two-wire connection to the probe controller provides for a simple and fast installation.



#### TPSMF Specifications:

Probe Housing: 316 Stainless Steel  
NEMA Rating: 4X  
Contact Style: Normally Closed Omni Directional  
Mercury Switch  
Maximum Switching Voltage: 240 VAC

Maximum Switching Current: 0.8 Amps @ 240 VAC /  
Amps @ 120 VAC  
Maximum VA: 200  
Operating Angle: 15 Degrees +/- 3 Degrees  
Operating Temperature: -37 to 100 C / -35 to 212 F

The **DCL Illuminated Tilt Probe TPSML** offers the same rugged construction as the TPSMF with the addition of ultra bright red LED's that illuminate when the probe is tilted 15 degrees or more. The LED's are potted in a clear epoxy on the top of the tilt switch and are easily visible from any direction when the probe is tilted beyond the 15 degree switch point. The Illuminated Tilt Probe must be used with the DCL Probe Controller PCUV-A.

#### TPSML Specifications:

Probe Housing: 316 Stainless Steel  
NEMA Rating: 4X  
Contact Style: Normally Closed Mercury Switch  
Maximum Switching Voltage: 12 VDC

Operating Angle: 15 Degrees +/- 3 Degrees  
Operating Temperature: -37 to 100 C / -35 to 212 F  
\*Probe must be used with DCL Probe Controller PCUV-A

The **DCL Probe Controller PCUV-A** is housed in a UL & cUL listed NEMA 4X polycarbonate enclosure with a transparent cover. The controller has an LED cluster that illuminates green when the probe is hanging at angles below 15 degrees and changes to red when the probe tilts beyond 15 degrees. The controllers DPDT relay output is energized when the probe is hanging at angles below 15 degrees and drops out when the probe tilts beyond 15 degrees providing a fail-safe operation. An adjustable 0-10 second time delay on the output relay is used to prevent false signals caused from momentary tilting.

#### PCUV-A Specifications:

Output Type: D.P.D.T. Relay  
Rated Load (Resistive pf = 1): 5 Amps @ 24 VDC / 5 Amps @ 240 VAC  
Rated Load (Inductive pf = .4): 3 Amps @ 24 VDC / 2 Amps @ 240 VAC  
Minimum Permissible Load: 10 mA @ 5 VDC  
Time Delay Adjustable: 0.1 to 10 Seconds

Supply Voltage Range: 85 to 265 VAC  
Supply Frequency Range: 47 to 63 HZ  
Maximum Power Consumption: 5 Watts  
Operating Temperature: -40 to 85 C / -40 to 185 F  
NEMA Rating: Type 4X, Polycarbonate Enclosure

#### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



Dust Control and Loading Systems

Leaders in Innovative Bulk Loading Systems Design


## Pneumatic Level Sensor

### PNEUMATIC LEVEL SENSOR


DCL's Pneumatic Level Sensor offers a simplistic approach to solving the problem of probe selection for the industries most difficult applications. The sensor will detect the presence of minus 20 mesh materials whether in a highly fluid state or at rest. This sensor does not utilize electronics to provide the actual sensing, therefore it is ideal for high or low temperature applications.

All pneumatic level sensor adjustments have been set at the factory. However if the probe does need to be adjusted, there are two adjustment screws. One located on the pressure switch which adjusts sensitivity and the other located on the flow meter which adjusts strength.


The system can be checked for operational function by plugging the pneumatic level sensor (simulating product presence). This will test and indicate level full.

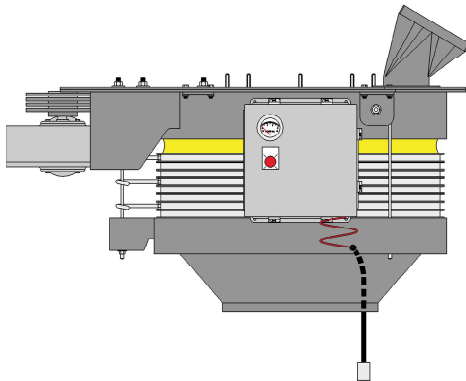


**Loading Spout Application**  
(Pneumatic Level Sensor used to detect full level in vehicle.)

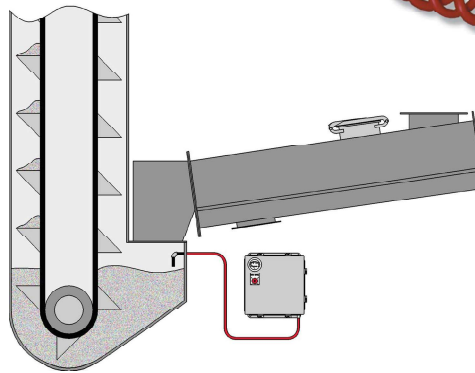

**Bucket Elevator Application**  
(Pneumatic Level Sensor used to detect high level in bucket elevator boot.)

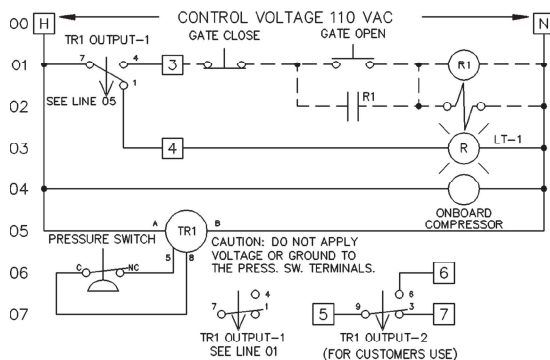

FFFD GATE-IN RFLAY BY OTHERS  
FEED GATE-SOLENOID VALVE BY OTHERS  
LEVEL FULL PILOT LIGHT BY DCL

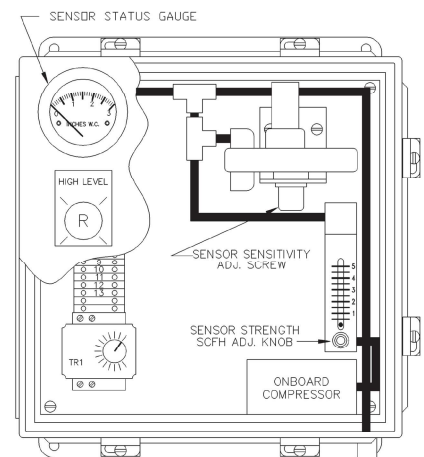

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)


URL : [www.dclbulktech.com](http://www.dclbulktech.com)

## Valve Positioning Package

### APPLICATION

The DCL Valve Positioning Package provides a cost effective solution to flow control of aerated material. The control package comes pre-wired and pre-plumbed to the cylinder, which allows an easy retrofit to existing equipment.

The package provides three position control of the pneumatic cylinder. Closed, an adjustable mid or slow feed position, and an adjustable open position. Adjusting the reed switch location on the cylinder makes adjustment of the mid and open positions.

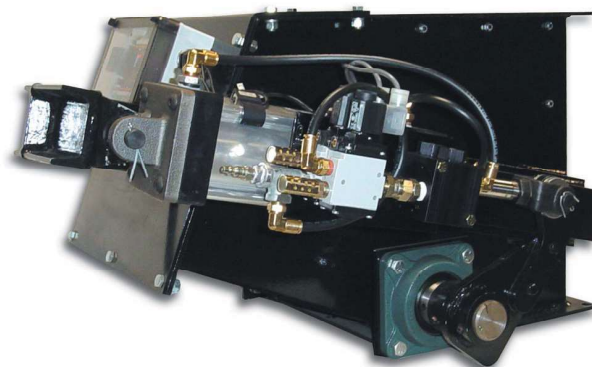

### FUNCTIONAL SPECIFICATIONS

#### Temperature Range

Standard: +14 to +140 degrees Fahrenheit (-10 to +60 degrees Celsius).

Optional: -30 to +185 degrees Fahrenheit (-34 to +85 degrees Celsius).

#### Ingress

Standard: NEMA 4, IP66

Optional: NEMA 7 & 9



#### Package Requirements

Pneumatic: 3/8" NPT, 60 to 125 PSI.

Air Consumption: Depends on cylinder size and frequency of use.

Electrical: 85 to 250 VAC

Power Consumption: 15 watts @ 120 VAC

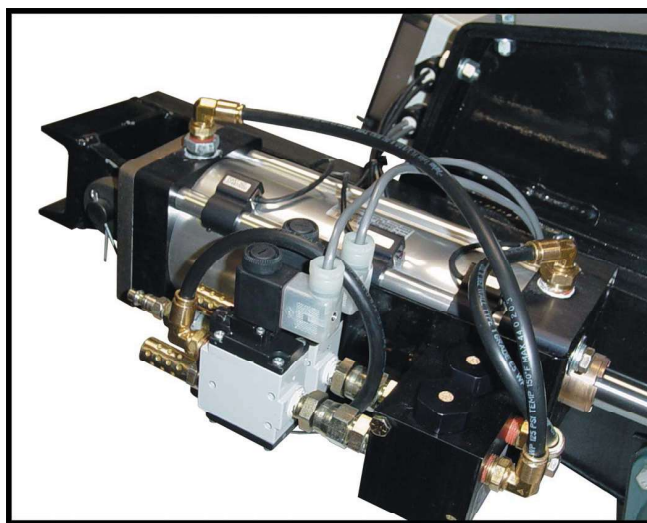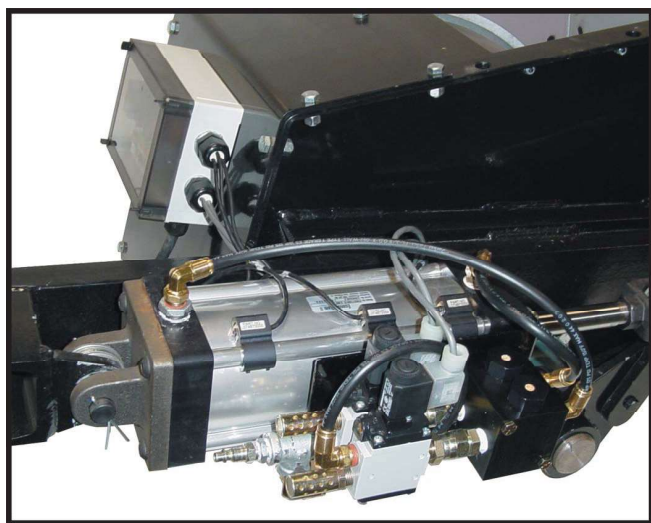

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



**CASE HISTORY**

**High Speed Loading of  
Extremely Dusty Materials**

To meet long term environmental commitments a major alumina producer in Jamaica found the need to make an equipment upgrade to address the dust pollution and material losses in the ship loading operation. The dust was causing the work environment to be uncomfortable and inefficient. Not only that, material being lost could be regarded as profits lost in the wind.

Preliminary engineering studies started in late 1990 and manufacturers of the ship loading equipment were invited to submit proposals. After months of evaluation, Michigan-based, Dust Control and Loading Systems Inc. (DCL) was chosen as the preferred supplier for the new ship loader pending successful testing. It had taken on the challenge of fabricating a telescopic aeration conveyor. The type of equipment best suited for the existing gantry due to equipment restrictions.

The prototype conveyor and loading spout were tested in DCL's laboratory. Based on the positive outcome of the test the contract to modify the ship loading gantry structure and furnish the new high capacity loading equipment was won. The scope of supply would include a new aluminium luffing boom with telescopic aeration conveyor, telescopic loading spout, new silo reclaim gates, and a master loading system control panel with deck-operated radio controller.

According to the customer "the unique and custom engineered equipment which loads alumina at rates in excess of 1,400 tons per hour has resulted in a system that exceeded out best expectations... shipping efficiency has improved significantly as visibility in the ship's hold is now nearly 100 percent... its design incorporates a luffing boom and 45 feet of telescopic aeration conveyor providing a horizontal reach of 87 feet. It is considered to be state of the art, and one of two of this size in operation throughout the world."

**SHIP LOADER LUFFING BOOM**

The existing walking gantry incorporated a luffing boom with a fixed air slide and two discharge points. Each discharge included a steel discharge pipe with no means of dust withdrawal.

The design criteria for the supply of the boom was to provide 45 feet of travel perpendicular to the ship so that 35,000 DWT and 60,000 DWT ships could be properly loaded. To eliminate the complications associated with a shuttling belt conveyor, it was decided that the cleanest way to transport the alumina to the boom discharge point would be with an enclosed aeration conveyor. A totally enclosed telescopic conveyor, utilizing wide conveying surface that would easily accommodate surges, was engineered. The conveyor housing incorporates an internally mounted telescopic air withdrawal duct which is required to connect the loading spout at the end of the boom to the new dust collector mounted on the gantry. Because of limited jetty wheel load capacity, it would be necessary to build the complete boom of 6061 T-6 aluminium.



*Fig. 1a and 1b. Dust caused by loading of bulk dry materials.*



*Fig. 2a. Boom in loading position with telescoping conveyor, fully extended.*



**DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

## SHIP LOADING SPOUT

In order to achieve proper dust control at the point of loading, DCL's model OV58-60 (aspirated) loading spout with "dead fall" dust suppressor would need to be used. The loading spout was provided with 40 feet of vertical travel to allow its discharge skirt to reach the bottom of the ship's hold. The spout is also vented to a dust collector with aspiration of 10,000 CFM.

The loading spout is designed with inner flow containment cones constructed of cast urethane for weight savings and an outer flexible spout sleeve that acts as a duct to convey the dust laden air. The spout "dead fall" discharge absorbs the energy of the falling alumina passively utilising no moving or actuated parts. Finally a flexible discharge skirt rests on the product pile to seal the loading operation.

Four tilt probes monitor the height of the product pile automatically adjusting the spout to keep its skirt in contact with the pile at all times. The "dead fall" enclosure incorporates two internal plug protection probes which provide an emergency system shut down signal in the event of a spout drive failure. The discharge enclosure is also fitted with four gravity operated plug relief doors which instantly relieve the system of a potential plugged condition.



Fig. 2b. Boom and loading spout in stored position.



Fig. 3b. Tilt probes automatically raise the spout, with the product pile.



Fig. 3c. New 'DCL' console controls all equipment from storage reclaim to ship loader.



Fig. 4a. Dust free loading is accomplished with a unique design "dead fall" discharge device.



Fig. 3a. Loading spout extends to reach ship hold bottom.

## SILO RECLAIM AND SYSTEM CONTROLS

The existing reclaim gates had no practical means of adjusting the rate of flow onto the reclaim belt conveyor. DCL provided new electrically actuated gates, incorporating remote percentage of opening indication, to the master control panel. The control scheme allows the operator remote control of the individual gate openings for the purpose of blending material retrieved from storage.

A master control console was provided with a full complement of lights portraying the status of all equipment from the storage silo to the ship loader. The system also includes separate radio remote control of the gantry, together with boom and loading spout functions which can easily be operated from the ship's deck due to the dust free nature of the loading operation. Features supplied on similar systems include printout reports of equipment activities identifying the frequency of system starts, running and shut down duration, and alarm trips while providing maintenance prompts based on hours of equipment operation.

DCL has proven that high speed loading of alumina can be achieved in an environmentally sound manner. It has supplied similar equipment to other Caribbean alumina handling facilities, as well as to other facilities worldwide, which cope well with up to 3,000 tons per hour of equally difficult materials such as soda ash, rock phosphate, sodium sulphate, petroleum coke, and clays.



## CASE HISTORY

### Flat Bottom Silo Aeration Loadout Terminal

#### CALIFORNIA PORTLAND CEMENT CASE HISTORY

Southern Nevada is one of the fastest growing areas in the United States and is expected to grow for the next 20 years. In response, California Portland Cement has constructed a transfer terminal in the city of North Las Vegas capable of transferring 500,000 tons of cement per year to the Nevada market. The terminal is designed to off load 100 ton railcars at a rate of 200 tons per hour into three 1200 ton steel silos using a pneumatic conveyor system. A dedicated double rail spur will accommodate up to 30 railcars by simply feeding cars from one spur to the other. Three silos permit the handling of more than one product and three adjustable loading spouts accommodate a variety of truck configurations. The city of North Las Vegas, surrounding landowners, and developers required that the terminal height be minimized to mitigate the visual impact of the terminal on other developments. A maximum overall height of 62 feet was considered acceptable. The terminal configuration is designed to blend with the surrounding land use and be aesthetically acceptable to the city and local developers.



California Portland Cement - North Las Vegas, Nevada

#### STORAGE SILOS

The total storage capacity of the terminal is 91,000 cubic feet. The three silos are identical in size and each have a cement capacity of 1200 tons. The center silo can discharge to either of the loading spouts and can be used for alternate products. The center silo can also be discharged to the pneumatic conveyor to recirculate from one silo to the other. In order to accommodate the height restrictions yet accommodate the storage requirements, a 38 feet 6 inch diameter fully aerated 8 degree silo bottom is incorporated.

The silo bottom is provided with aeration pads covering 90% of the surface. The pads are segmented and selectively valve controlled to the required location to limit the blower size to 600 CFM. The resultant reclaim capability is 99.6% of the stored product.



Loadout station equipped with two loading spouts and positioners.

#### LOADING EQUIPMENT

The cement is conveyed from the silo bin bottoms to the loading spouts by aeration conveyors. The two outboard loading spouts incorporate 2 feet by 6 feet horizontal positioners on 53 feet centers. The spouts reach truck hatches from 47 feet to 59 feet apart which satisfies most all trucks using the terminal. A third spout and 2 feet by 2 feet positioner is used in the center to accommodate triple trailer rigs. Each loading point is provided with an integral dust collector eliminating the need for duct and maintenance associated with a remotely mounted dust collector. A 130 feet long above ground scale is supplied as two independent platforms allowing the simultaneous loading of each trailer reducing the loading time. Dual trailer 120,000 LB Nevada rigs are loaded in 5 minutes.

The loading spouts are fitted with self sealing cones which close the discharge when not seated in the hatch. The self sealing cones reduce house keeping requirements eliminating cement dribbling from the spout when retracted.

#### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)





*DCL's flat bottom silo aeration configuration, typical for all three silos.*




*Aerated bin bottom silo discharge.*

## RAIL UNLOADING

One hundred ton railcars deliver cement to the terminal. The cement is unloaded through two unloading boots which seal against the rail car discharge doors. The cement is discharged into two inclined drag conveyors and conveyed to a dilute phase dual pod conveying system that delivers the cement to one of the three selected silos. The pneumatic conveyor was chosen to maintain a low elevation profile on top of the silos and to allow for the future expansion of the conveying system.

## CONTROLS

The control building is of a block structure and houses the managers office, operators control room, motor control center and spare parts storage with workshop. The terminal is controlled through an Allen Bradley PLC SLC 500 with a PC interface. The truck filling is PLC controlled with a manual override. The operator aligns the spouts to the hatches with the aide of video cameras. The filling as well as the silo aeration sequence is automatic once initiated through the start button. The scale is of a twin platform design allowing the filling of two trailers simultaneously reducing the filling time while maintaining control of each trailer weight. Inventory and shipping data is transmitted to CPCC offices by data line.

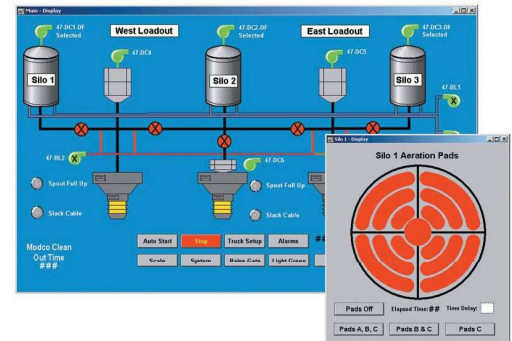



Dust Control and Loading Systems

Leaders in Innovative Bulk Loading Systems Design

## CASE HISTORY

### Technology Breakthrough Fully Automated Loadout Terminal

#### BULK LOADOUT AUTOMATION

By Lon Rice - Project Manager, Hanson Cement

Hanson Permanente Cement in Cupertino, California has successfully completed three fully automated bulk cement truck loading systems. This facility loads, hands free, between 150 to 400 trucks per 24 hour period. This new operator free system can load both semi-trucks and tandem trailers in less than 6 minutes from the start of truck entry until the truck exits the scale.

Hanson's upper management wanted to upgrade the bulk loadout to match the rest of the plant. Customer convenience and safety were the key issues in this project.

#### The goals were to:

- **Clean up the area** -- The area was constantly wet and muddy due to water leaks and poor drainage. There was a old lime plant in the area and the equipment obstructed traffic flow.
- **Reduce the loading time** -- The existing spout system could not be moved to reach the truck position, therefore the trucks had to move back and forth to line up with the spouts.
- **Make the system more customer friendly** -- Customers had to exit their trucks and carry the cement order up a set of stairs to the operator, loading was slow and inaccurate.
- **Increase safety** -- Keeping the drivers in their trucks would make the loading operation safer for the drivers.



*Trucks are loaded dust free  
at rates to 1000 TPH.*



*Typical equipment arrangement  
for fully automatic loading.*

The ideas were great, but there were many unknowns. So it was decided to do the work in two stages.

#### First Stage

- **Demolish the old plant silos.**
- **Dig up the lime plant foundations.**
- **Reroute the gas line.**
- **Repair the water leaks and remove the mud.**
- **Lay down a new asphalt staging area.**

#### Second Stage

- **Build a fully automatic loading system without interrupting the flow of traffic.**

This was the hard part. We knew what we wanted to do. The basic design had been drawn up and approved, but no one had built a fully automatic loadout station before. Most of the software for this endeavor had to be written specifically for the application. The Vision System used to scan the top of the trucks had not yet been adapted to a carriage and spout assembly and every truck is different. Card readers were not new, but using them to run a computer operated system was very complicated.

#### **DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

Versatility was a primary requirement. This system was made to accommodate any truck configuration that could fit under the holding bin and onto the scale. Load rates, quantities, and percentages are varied automatically for each truck. The system even knows if there is product remaining in the trailer from a previous load.

Driver safety being an issue in all cement plants necessitated that we build a facility that would limit the requirement for the driver to exit his truck at the weigh master's office and at the loading scales. Drivers walking around the loadout area are in danger of being hit by mobile equipment and plant equipment. RF card readers are used to allow the driver to communicate with the loadout computer. The driver need only get the card within 3 feet of the reader to activate data transfer.

Every component was designed to minimize customer waiting and loading time. Keeping the driver in his truck cuts loading time loss due to drivers visiting when they should be loading. The spout being able to locate the trailer hatch has totally eliminated the trailer alignment time. The system was designed to place cement in the trailers as fast as air can be extracted from the cement. This appears to be at a maximum flow instantaneous rate of 1000 tons per hour. Above this flow rate the trailers tend to overflow before the full load can be placed. Before the installation 10% of the customer's trucks were over or under loaded, causing delays in loading and extra cost to the customer. After the installation, over and under loads are close to zero.



*Driver never leaves his truck.*

The SmartLoader being able to locate hatch openings has solved the problem of truck drivers having problems lining up with the spout. Using the articulating airslide, the spout travel dimensions could be any thing required to service our customers. In our case the spout covers a rectangular area 35 feet by 2 feet. There is no limit to the location and/or number of hatches the system can be set to manage.

The loadout system is driver friendly. Drivers only need to know where the loadouts are located and how to use the RF cards. Everything else is automated and intuitively placed such that drivers can follow flow and get loaded with out any additional assistance. First time customers are given a very short explanation by the weigh master. This has proven to be more than sufficient for the last year of operation.

Physically, the loadout systems consist of a weigh master's office, cement holding bins, truck scales, articulating airslides, dust collectors, computers and the SmartLoaders which are the heart of the system.

**LOADING SEQUENCE**

The loading process is as follows; customer's truck enters the plant and stops at the weigh master's drive up window. The weigh master issues the driver a RF card. The card is used by the driver to gain access to the loadout and the computers, obtain loading information from the server and to track the loading operation. The driver proceeds to the appropriate loadout where, without exiting his truck, he flashes the card at the RF card reader. Traffic lights guide the truck onto the scale. Once the truck is in place, DCL's patented Smart Spout Vision System scans the top of the vehicle locating valid open hatches and automatically places the spout in the trailer's first open hatch. The fully automated on-scale loadout system feeds weight data to the host control system for cement flow modulation. When the first hatch is full the spout automatically moves to the second and third hatches filling them in the same manner. When the filling of the trailers is complete, traffic lights signal the trucks to exit the scale. The weight and time data are transferred electronically to the weigh master's office. When the customer reaches the weigh master's office, he places the RF card in a slot and the computer prints out the BOL to the driver. Daily sales data is forwarded to our main frame computer each night via modem.

*Lon Rice / Project Manager and  
Reinhard Matye / DCL President.*



*There were a number of contractors and vendors involved in the design and supply of the equipment used in this project.*

<i>Bentley Engineering</i> .....	<i>Civil, structural, mechanical design and construction management.</i>
<i>DCL, Inc</i> .....	<i>Cement handling equipment and SmartLoader System.</i>
<i>Engineering Systems, Inc</i> .....	<i>Electrical design.</i>
<i>Engineering Systems Integration, Inc</i> .....	<i>Software and computers.</i>
<i>Pacific Processing</i> .....	<i>Civil, structural and mechanical installation.</i>
<i>Contra Costa Electric</i> .....	<i>Electrical installation.</i>
<i>JWS</i> .....	<i>Ticketing and data transfer software.</i>



# **WAGON LOADING SYSTEMS ▼**

**▶ CLINKER WAGON LOADING**

**▶ GRAIN WAGON LOADING**

**▶ CEMENT WAGON LOADING**

**▶ FLY ASH WAGON LOADING**

## Clinker Wagon Loading Systems

### INSTALLATIONS IN INDIA



DCL Bulk Technologies Pvt. Ltd., manufactures Wagon Loading Systems to suit loading of any dry bulk material into open / enclosed rail wagons Of Indian Railways. Systems are designed in such a way to suit loading times stipulated by Indian Railways. DCL's Wagon Loading Systems are already in use in many cement plants across India.

### HATCH ADAPTER SYSTEM

This system was introduced in 1987, Hatch driven by a winch mechanism to suit the wagon size with three telescopic product tubes fixed between the flow control gates and the hatch adapter with two dust extraction points on Hatch top connected to a bag filter with a hopper by means of a flexible below to extract the dust that is again pulsed back into the product during loading. Flow control gates are PIN & ROD / Pneumatic shut off / curved blade gate.

### RAPID LOADING SYSTEMS

This model is recommended normally for pit head coal and other mines, where a moving hydraulic arm with a pivot loads the product in to the wagon while in motion.

Wagon Loading Systems can be supplied along with a weigh bridge of any reputed make along with a PLC / MCC.

DCL supplied **Cement Wagon Loading Systems** are in use at Leading Cement Plants in India. Similar Systems can also be designed to Load Fly Ash too.

India's First ever **Grain Wagon Loading Systems** are installed at Adani Agri Logistics facilities at Moga & Kaithal respectively. Many more similar installations are under proposal stage

### DCL BULK TECHNOLOGIES PVT. LTD.

(A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India

Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)

## References - India



Enclosed Vehicle Loading System



Enclosed Vehicle Loading System



Ship Loading System



Open Vehicle Loading System



Ventilation Module (VMV) on Silo Top

### **DCL BULK TECHNOLOGIES PVT. LTD.**

(A 100% Indian Subsidiary of DCL Inc., U.S.A)


Plot No 18 A, Phase, -1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India


Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com)

URL : [www.dclbulktech.com](http://www.dclbulktech.com)



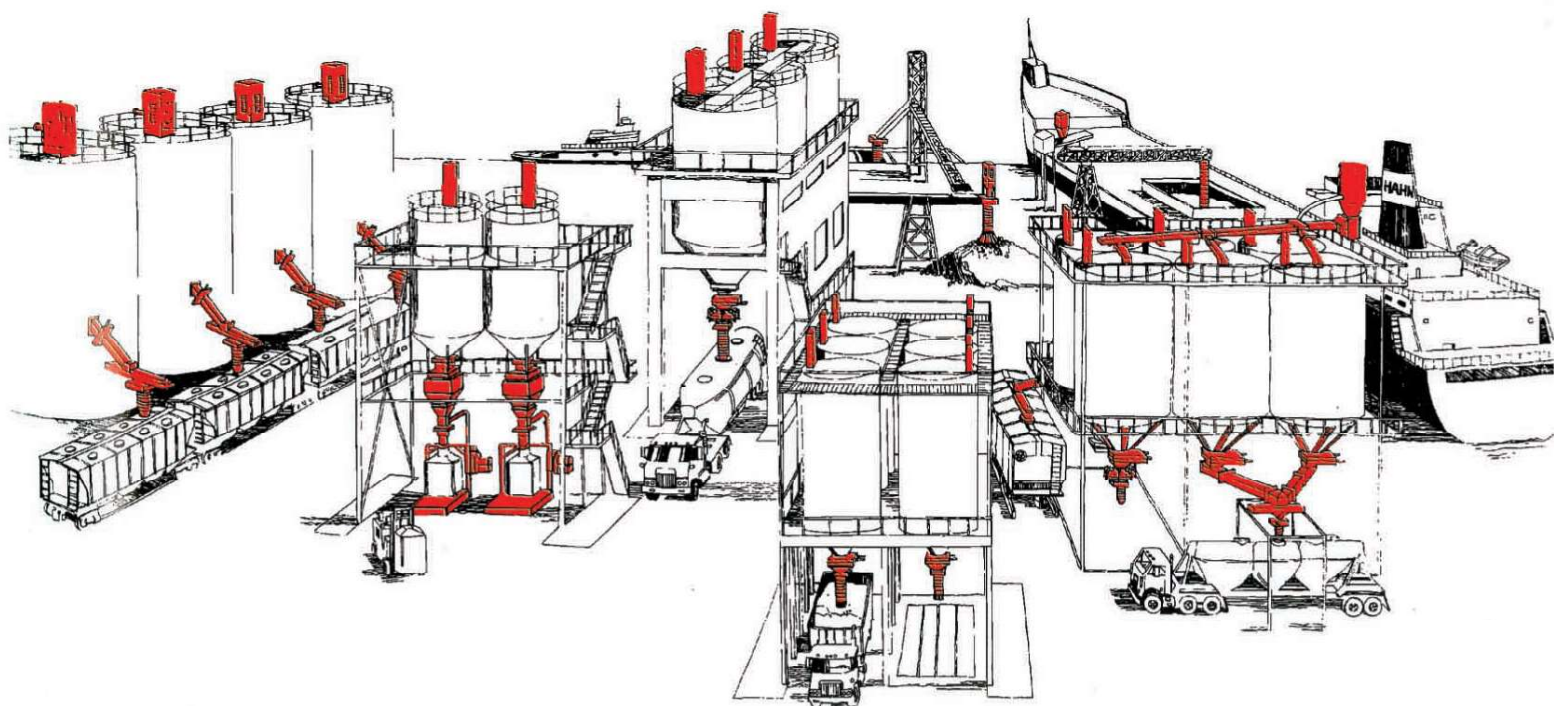

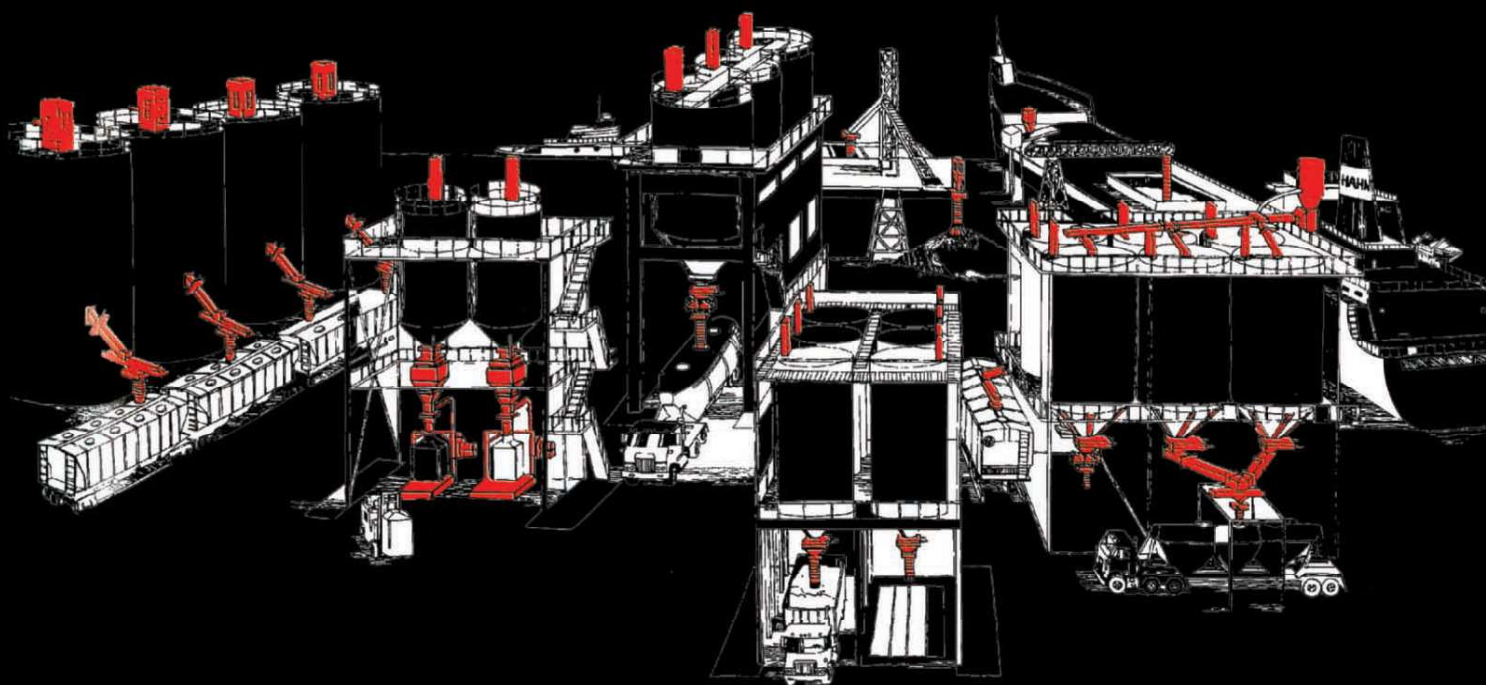

**Asian Operations : DCL BULK TECHNOLOGIES PVT. LTD.,** (A 100% Indian Subsidiary of DCL Inc., U.S.A)

Plot No 18 A, Phase,-1, IDA, Jeedimetla, Hyderabad 500 055, Telangana State, India, Phone : +91-40-23093888 (Board Line)

e-mail : [info@dclbulktech.com](mailto:info@dclbulktech.com), [marketing@dclbulktech.com](mailto:marketing@dclbulktech.com), URL : [www.dclbulktech.com](http://www.dclbulktech.com)

Corporate Office

P.O. Box No : 12508660, ANCE Road, Charlevoix-M149720. U.S.A. Phone : 231-547-5600, Fax : 23-547-3343

Website : [www.dclinc.com](http://www.dclinc.com)